


Low Noise, Low Power Dissipation, 16/24-Bit Σ-Δ ADC

PRODUCT DESCRIPTION

The MS5196T/MS5197T is a 16bit/24bit ADC featured by low power dissipation, low noise, differential inputs and it is suitable for high-precision measurement application.

The MS5196T/MS5197T integrates low noise input buffer, low noise instrumentation amplifier and temperature sensor for temperature compensation in test. And it also could adopt external or internal clock. The output data rate can be set from 4.17Hz to 123Hz by software. The power supply ranges from 2.7V to 5.25V and the typical power dissipation is 320μA. The MS5196T/MS5197T is available in TSSOP16 package.

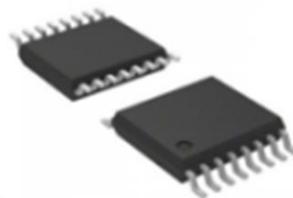

TSSOP16

FEATURES

- RMS Noise: 65nV
- Power Dissipation: 320μA (Typ)
- Integrated Low Noise, Gain Instrumentation Amplifier
- Integrated Temperature Sensor
- Integrated Internal Clock Oscillator
- Update Rate: 4.17Hz to 123Hz
- Integrated 50Hz/60Hz Rejection Filter
- Power Supply: 2.7V to 5.25V
- Operating Temperature Range: -40°C to 120°C


APPLICATIONS

- RTD Measurement
- Stress Detection
- Gas Analysis and Blood Analysis
- Industrial Process Control and Instrumentation
- Liquid and Gas Chromatograph
- Smart Transmitter
- 6-bit DVM

PRODUCT SPECIFICATION

| Part Number | Package | Marking |
|-------------|---------|---------|
| MS5196T | TSSOP16 | MS5196T |
| MS5197T | TSSOP16 | MS5197T |


PIN CONFIGURATION

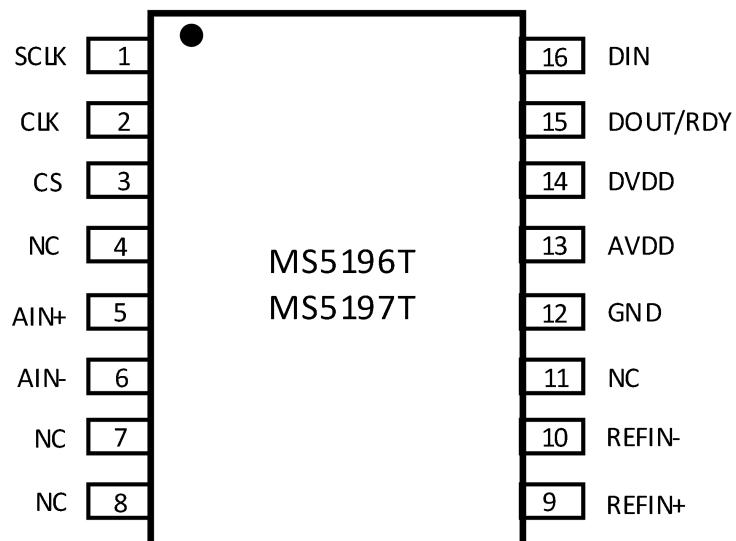

PIN DESCRIPTION

| Pin | Name | Type | Description |
|-----|----------|------|---|
| 1 | SCLK | I | Serial Clock Input |
| 2 | CLK | I | Clock Input/Clock Output. Provide or Disable Internal Clock. When internal clock is disabled, apply external clock to drive the ADC. Therefore, several ADCs could be driven by same clock to execute synchronous conversion. |
| 3 | CS | I | Chip Select Input |
| 4 | NC | - | Not Connection |
| 5 | AIN+ | I | Analog Channel Positive Input Pin |
| 6 | AIN- | I | Analog Channel Negative Input Pin |
| 7 | NC | - | Not Connection |
| 8 | NC | - | Not Connection |
| 9 | REFIN+ | I | Positive Reference Voltage Input Pin |
| 10 | REFIN- | I | Negative Reference Voltage Input Pin |
| 11 | NC | - | Not Connection |
| 12 | GND | - | Ground |
| 13 | AVDD | - | Analog Power Supply Voltage (2.7V to 5.25 V) |
| 14 | DVDD | - | Digital Interface Power Pin |
| 15 | DOUT/RDY | O | Serial Data Output/Data Ready Output Pin |
| 16 | DIN | I | Serial Data Input |

BLOCK DIAGRAM

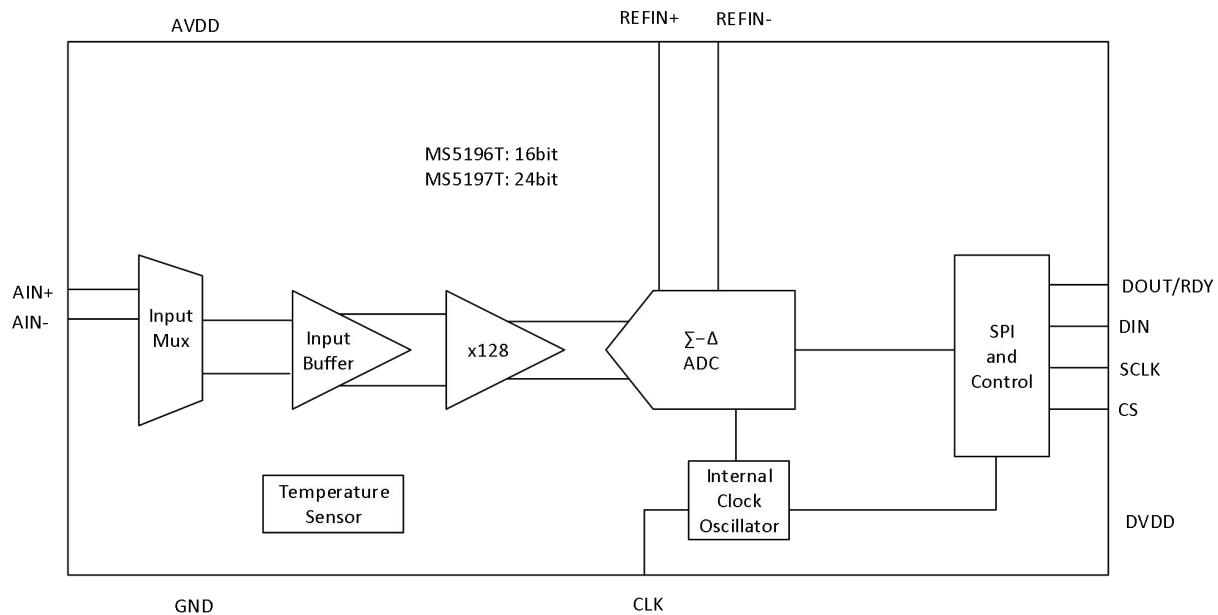

ABSOLUTE MAXIMUM RATINGS

Any exceeding absolute maximum rating application causes permanent damage to device. Because long-time absolute operation state affects device reliability. Absolute ratings just conclude from a series of extreme tests. It doesn't represent chip can operate normally in these extreme conditions.

| Parameter | Symbol | Range | Unit |
|---------------------------|------------------|-----------------|------|
| Analog Power Supply | AVDD | -0.3 ~ +7.0 | V |
| Digital Power Supply | DVDD | -0.3 ~ +7.0 | V |
| Analog Input Voltage | AIN | -0.3 ~ AVDD+0.3 | V |
| Reference Voltage | VREFIN | -0.3 ~ AVDD+0.3 | V |
| Digital Input Voltage | | -0.3 ~ DVDD+0.3 | V |
| Digital Output Voltage | V(LE) | -0.3 ~ DVDD+0.3 | V |
| Input Port Current | | 10 | mA |
| Operating Temperature | | -40 ~ 125 | °C |
| Storage Temperature | T _{stg} | -60 ~ 150 | °C |
| Lead Temperature (10 sec) | | 260 | °C |
| ESD (HBM) | | 4000 | V |

ELECTRICAL CHARACTERISTICS

AVDD=2.7V to 5.25V, DVDD=2.7V to 5.25V, GND=0V, REFIN(+) = AVDD, REFIN(-) = 0V.

Unless otherwise noted, parameters are in full temperature range.

| Parameter | Condition | Min | Typ | Max | Unit |
|--|---|---------------|-----------|--------------|------------|
| ADC Channel | | | | | |
| Output Rate | | 4.17-123 | | | Hz |
| No Missing Codes Accuracy | | 24/16 | | | Bits |
| Resolution | See Page 8 | | | | |
| Output Noise and Rate | See Page 8 | | | | |
| Integral Nonlinearity | | | | ±15 | ppm of FSR |
| Offset Error | | | ±1 | | µV |
| Offset Error Temperature Drift | | | ±10 | | nV/°C |
| Full-Scale Error | | | ±10 | | µV |
| Gain Temperature Drift | | | ±3 | | ppm/°C |
| Power Supply Rejection Ratio | AIN=1V/128 | 75 | | | dB |
| Analog Input | | | | | |
| Differential Input Voltage Range | | | ±VREF/128 | | V |
| Common-Mode Voltage | VCM= (AINP + AINN)/2, Gain= 4 to 128 | 0.5 | | | V |
| Analog Input Voltage | | GND+ 300mV | | AVDD- 1.1 | V |
| Analog Input Current | Update Rate < 100Hz | | | ±250 | pA |
| Analog Input Current Temperature Drift | | | ±2 | | pA/°C |
| Common-mode Rejection (Internal Clock) | DC, AIN = 1 V/128 | 90 | | | dB |
| | 50 ± 1 Hz, 60 ± 1 Hz (FS[3:0] = 1010) | 80 | | | dB |
| | 50 ± 1 Hz (FS[3:0] = 1001), 60 ± 1 Hz (FS[3:0] = 1000) | 90 | | | dB |
| External Reference Voltage | | | | | |
| Reference Voltage | | 0.1 | 2.5 | AVDD | V |
| Average Current, Reference Voltage Input | | | 400 | | nA/V |
| Average Current Temperature Drift, Reference Voltage Input | | | ±0.03 | | nA/V/°C |

| Parameter | Condition | Min | Typ | Max | Unit |
|------------------------------------|----------------------------|----------|-------|-------|-------|
| Common-mode Rejection | | | 100 | | dB |
| Temperature Sensor | | | | | |
| Accuracy | | | ±2 | | °C |
| Sensitivity | | | 0.9 | | mV/°C |
| Clock | | | | | |
| Internal Clock Frequency | | | 64±3% | | kHz |
| Internal Clock Duty Cycle | | | 50:50 | | % |
| External Clock Frequency | | | 64 | | kHz |
| External Clock Duty Cycle | | 45:55 | | 55:45 | % |
| Logic Input | | | | | |
| CS Input Low Voltage | DVDD=5V | | | 0.8 | V |
| | DVDD=3V | | | 0.4 | V |
| CS Input High Voltage | | 2.0 | | | V |
| SCLK and DIN | DVDD=5V | 1.4 | | 2 | V |
| | DVDD=3V | 0.9 | | 2 | V |
| SCLK and DIN | DVDD=5V | 0.8 | | 1.7 | V |
| | DVDD=3V | 0.4 | | 1.35 | V |
| SCLK and DIN | DVDD=5V | 0.1 | | 0.17 | V |
| | DVDD=3V | 0.06 | | 0.13 | V |
| Input Current | | | | ±10 | µA |
| Input Capacitance | | | 10 | | pF |
| Digital Logic Output | | | | | |
| Output High-level Voltage | AVDD=3 V, ISOURCE=100µA | DVDD-0.6 | | | V |
| | AVDD=5 V, ISOURCE=200µA | 4 | | | V |
| Output Low-level Voltage | AVDD=3 V, ISINK=100µA | | | 0.4 | V |
| | AVDD=5 V, ISINK=1.6mA | | | 0.4 | V |
| Leakage Current, Floating-State | | | | ±10 | µA |
| Output Capacitance, Floating-State | | | 10 | | pF |

| Parameter | Condition | Min | Typ | Max | Unit |
|---------------------------|-----------|----------|-----|---------|------|
| System Calibration | | | | | |
| Full-Scale Calibration | | | | 1.05×FS | V |
| Zero-Scale Calibration | | -1.05×FS | | 1.05×FS | V |
| Power Dissipation | | | | | |
| Power Supply Voltage | AVDD | 2.7 | | 5.25 | V |
| | DVDD | 2.7 | | 5.25 | V |
| Power Supply Current | AVDD=3V | | 300 | 340 | μA |
| | AVDD=5V | | 320 | 350 | |
| Shut-down Current | | | | 1 | μA |

OUTPUT NOISE and RESOLUTION (EXTERNAL REFERENCE)

The table below gives the output RMS noise for the MS5197T with some update rates and gain settings. These data are for bipolar input range and 2.5V external reference voltage. These values are typical when the differential input voltage is 0V. It is important to note that the effective resolution is calculated from root mean square noise.


Table 1. Output RMS Noise (μ V) VS. Gain and Update Rate for the MS5197T (2.5V Reference Voltage)

| Update Rate | RMS Noise (μ V) |
|-------------|----------------------|
| 4.17Hz | 0.043 |
| 8.33Hz | 0.054 |
| 16.7Hz | 0.102 |
| 33.2Hz | 0.157 |
| 62Hz | 0.181 |
| 123Hz | 0.263 |


Table 2. Effective Resolution VS. Gain and Update Rate for the MS5197T (2.5V Reference Voltage)

| Update Rate | Effective Resolution |
|-------------|----------------------|
| 4.17Hz | 18.4 |
| 8.33Hz | 18.1 |
| 16.7Hz | 17.2 |
| 33.2Hz | 16.5 |
| 62Hz | 16.3 |
| 123Hz | 15.8 |


TYPICAL CHARACTERISTICS CURVES

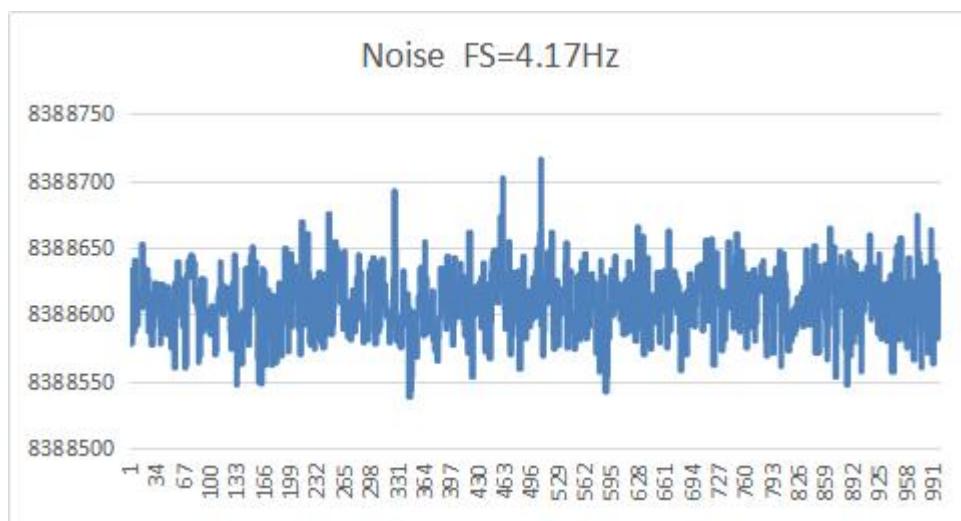


MS5197T Noise (AVDD=4V, VREF=2.048, Update Rate=4.17Hz)

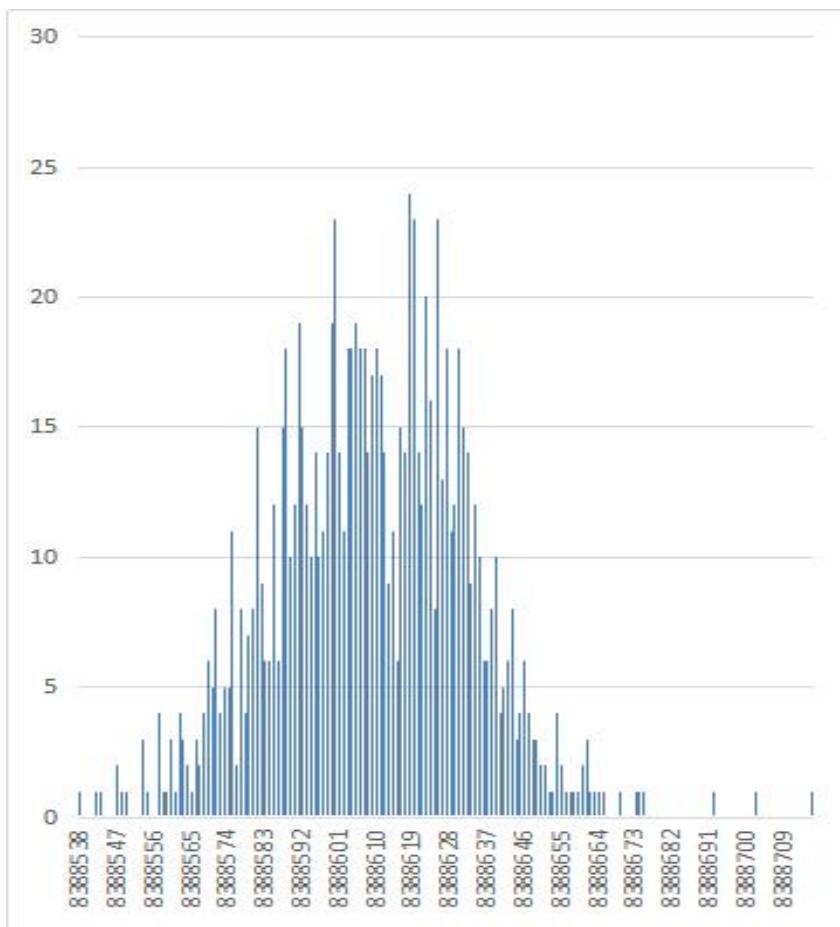

MS5197T Noise Distribution Histogram (AVDD=4V, VREF=2.048, Update Rate =4.17Hz)

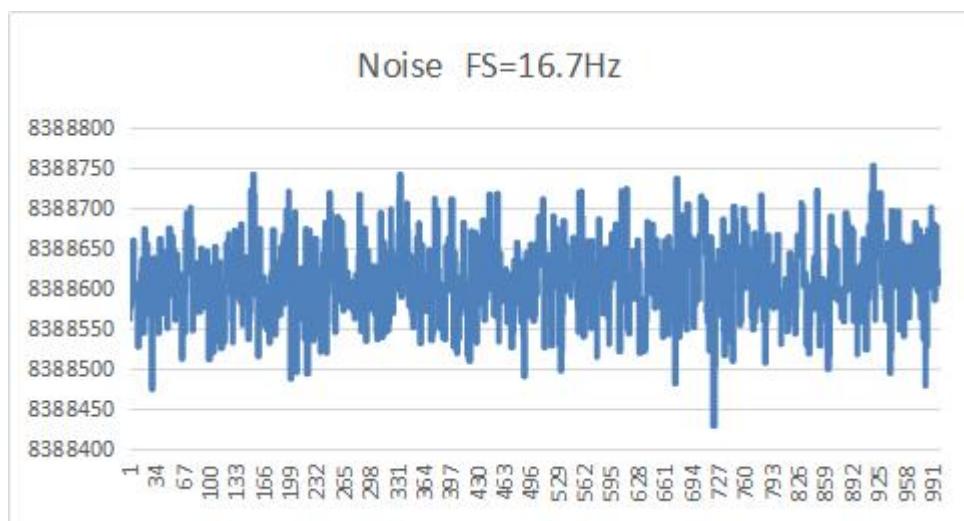


MS5197T Noise (AVDD=4V, VREF=2.048, Update Rate=16.7Hz)

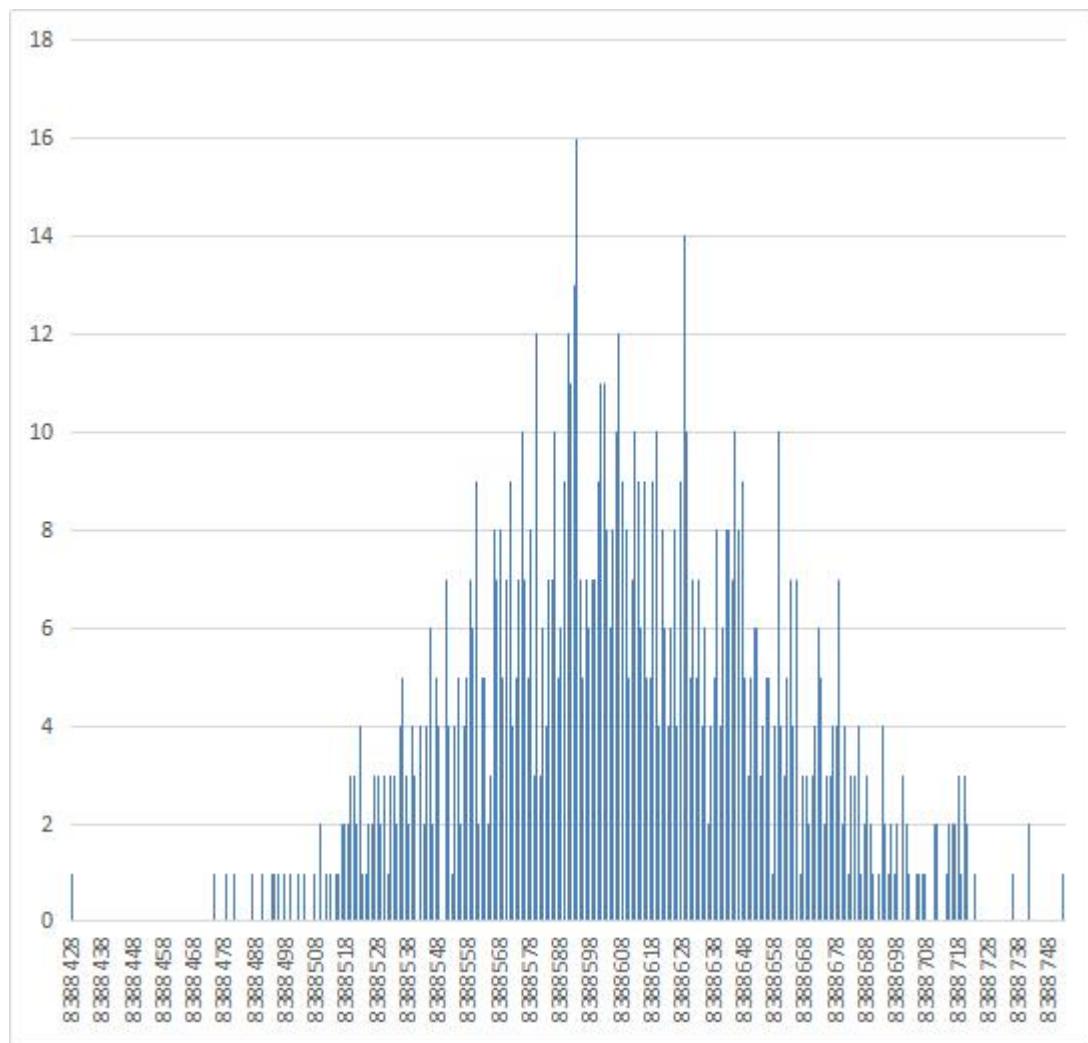


MS5197T Noise Distribution Histogram (AVDD=4V, VREF=2.048, Update Rate=16.7Hz)

TYPICAL APPLICATION DIAGRAM

The figure is a connection diagram for weigh scale measurement application for the MS5196T/MS5197T.

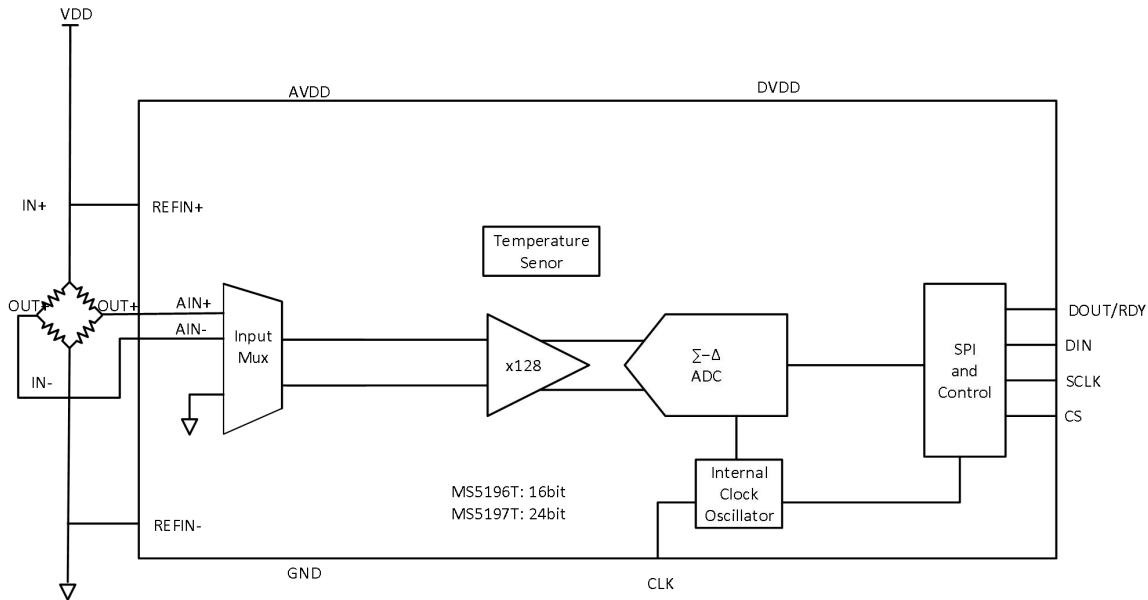

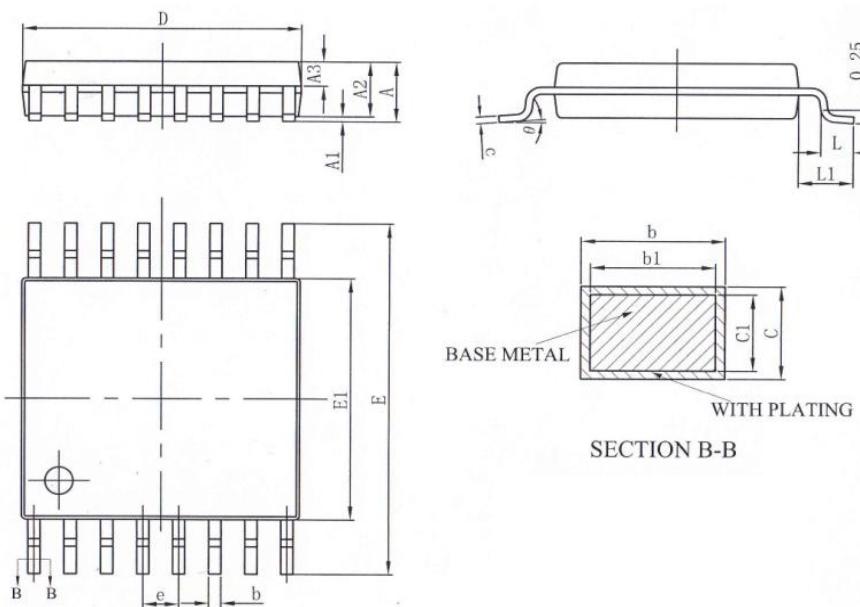PACKAGE OUTLINE DIMENSIONS
TSSOP16


| Symbol | Dimensions in Millimeters | | |
|--------|---------------------------|------|------|
| | Min | Typ | Max |
| A | - | - | 1.20 |
| A1 | 0.05 | - | 0.15 |
| A2 | 0.90 | 1.00 | 1.05 |
| A3 | 0.39 | 0.44 | 0.49 |
| b | 0.20 | - | 0.29 |
| b1 | 0.19 | 0.22 | 0.25 |
| c | 0.13 | - | 0.18 |
| c1 | 0.12 | 0.13 | 0.14 |
| D | 4.86 | 4.96 | 5.06 |
| E | 6.20 | 6.40 | 6.60 |
| E1 | 4.30 | 4.40 | 4.50 |
| e | 0.65BSC | | |
| L | 0.45 | 0.60 | 0.75 |
| L1 | 1.00BSC | | |
| θ | 0 | - | 8° |

MARKING and PACKAGING SPECIFICATIONS**1. Marking Drawing Description**

Product Name: MS5196T, MS5197T

Product Code: XXXXXXXX

2. Marking Drawing Demand

Laser printing, contents in the middle, font type Arial.

3. Packaging Specifications

| Device | Package | Piece/Reel | Reel/Box | Piece/Box | Box/Carton | Piece/Carton |
|---------|---------|------------|----------|-----------|------------|--------------|
| MS5196T | TSSOP16 | 3000 | 1 | 3000 | 8 | 24000 |
| MS5197T | TSSOP16 | 3000 | 1 | 3000 | 8 | 24000 |

STATEMENT

- All Revision Rights of Datasheets Reserved for Ruimeng. Don't release additional notice.
Customer should get latest version information and verify the integrity before placing order.
- When using Ruimeng products to design and produce, purchaser has the responsibility to observe safety standard and adopt corresponding precautions, in order to avoid personal injury and property loss caused by potential failure risk.
- The process of improving product is endless. And our company would sincerely provide more excellent product for customer.

**MOS CIRCUIT OPERATION PRECAUTIONS**

Static electricity can be generated in many places. The following precautions can be taken to effectively prevent the damage of MOS circuit caused by electrostatic discharge:

1. The operator shall ground through the anti-static wristband.
2. The equipment shell must be grounded.
3. The tools used in the assembly process must be grounded.
4. Must use conductor packaging or anti-static materials packaging or transportation.



+86-571-89966911



Rm701, No.9Building, No. 1 WeiYe Road, Puyan Street, Binjiang District, Hangzhou, Zhejiang



<http://www.relmon.com>