

FEATURES

- Low Power Consumption.
- Low Temperature Coefficient.
- Output Short Circuit Protected.
- Wide Operating Voltage Range.
- Good Input Stability.
- Space-Saving Package: TO-92 or SOT-89


APPLICATIONS

- LCD for Printing Calculators
- Cameras
- Voltage References for Instrumentation

DESCRIPTION

The AIC1714 is a series of 3-terminal negative voltage regulators with output voltages internally set below the positive supply voltage. Since the AIC1714 consumes less current and only requires a small input/output voltage difference than existing industry standard 3-terminal voltage regulators, a battery-powered portable equipment is afforded a high capacity and longer service life. The AIC1714 is ideal for power source of liquid crystal displays.


TYPICAL APPLICATION CIRCUIT


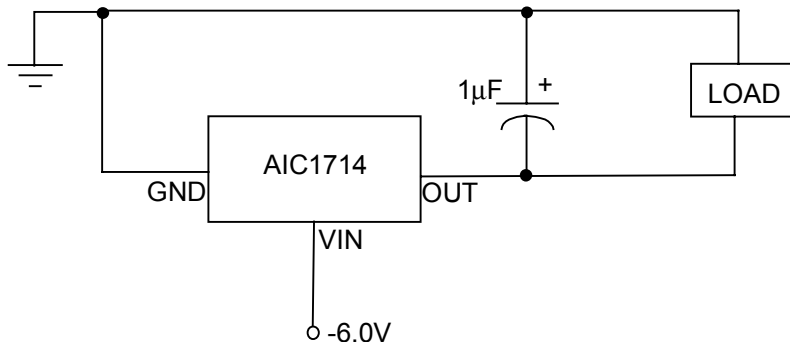


Negative Voltage Regulator

ORDERING INFORMATION

AIC1714-XX-XX

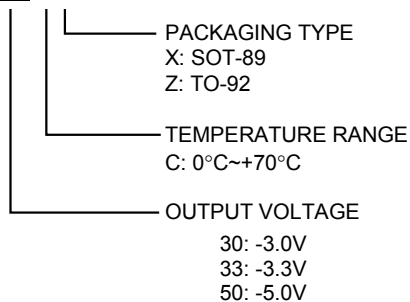


| ORDER NUMBER | PIN CONFIGURATION |
|--|--|
| AIC1714-30CX AIC1714-33CX AIC1714-50CX (SOT-89) | FRONT VIEW 1: VIN 2: GND 3: VOUT  |
| AIC1714-30CZ AIC1714-33CZ AIC1714-50CZ (TO-92) | TOP VIEW 1: GND 2: VIN 3: VOUT  |

■ ABSOLUTE MAXIMUM RATINGS

| | | |
|-----------------------------|----------------|--------------|
| Supply Voltage | | -13V |
| Operating Temperature Range | | - 20°C~80°C |
| Storage Temperature Range | | - 65°C~150°C |
| Power Dissipation | SOT-89 Package | 0. 80W |
| | TO-92 Package | 0.78W |


■ TEST CIRCUIT

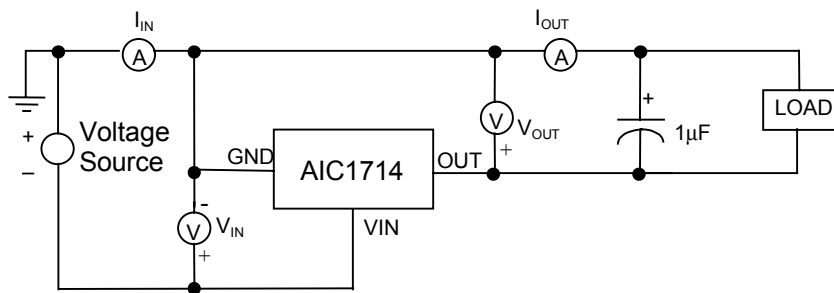





■ ELECTRICAL CHARACTERISTICS ($V_{IN} = -6.0V$, $T_a = 25^\circ C$, unless otherwise specified.)

| PARAMETER | TEST CONDITIONS | SYMBOL | MIN. | TYP. | MAX. | UNIT |
|------------------------------|-------------------------------|--|-------|------|-------|---------|
| Output Voltage | $I_{OUT} = 300\mu A$ | AIC1714-30 | -2.95 | -3.0 | -3.05 | V |
| | | AIC1714-33 | -3.25 | -3.3 | -3.35 | V |
| | | AIC1714-50 | -4.93 | -5.0 | -5.07 | V |
| Load Regulation | $I_{OUT} = 0 \sim 5mA$ | ΔV_{OUT} | | 20 | 100 | mV |
| I/O Voltage Difference | $I_{OUT} = 300\mu A$ | V_{DIFF} | | 50 | 200 | mV |
| Supply Current | $I_{OUT} = 0$ | I_{IN} | | 6 | 12 | μA |
| Input Stability | | $\frac{\Delta V_{OUT}}{\Delta V_{IN} \cdot V_{OUT}}$ | | 0.05 | | %/V |
| Temperature Coefficient | $-25^\circ C \sim 85^\circ C$ | T_C | | 50 | | ppm |
| Output Short Circuit Current | $R_{LOAD} = 0$ | | 15 | 24 | | mA |


BLOCK DIAGRAM

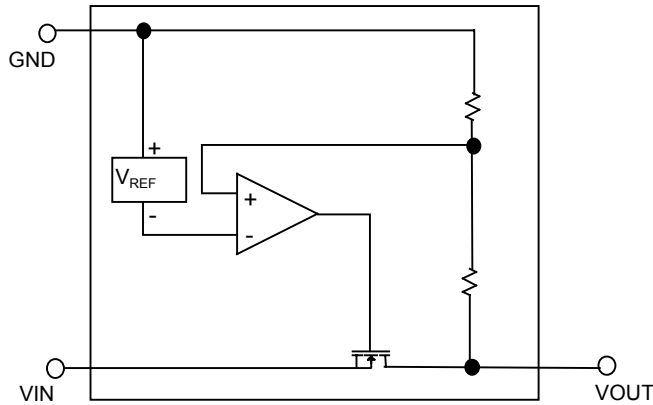

TYPICAL PERFORMANCE CHARACTERISTICS

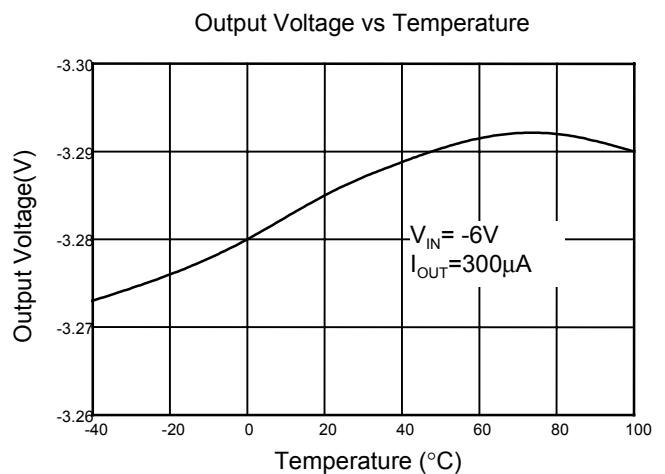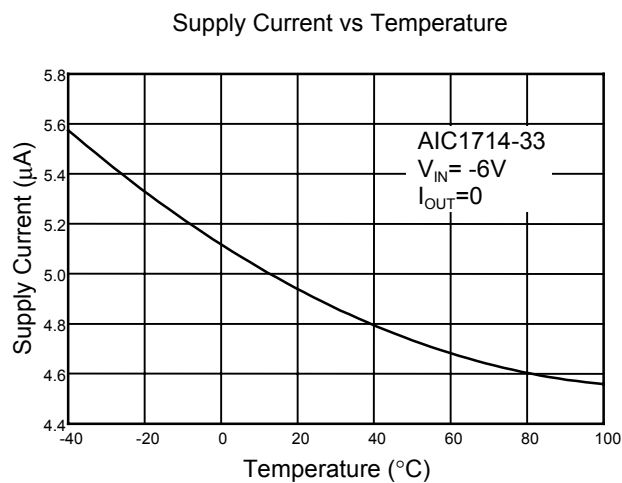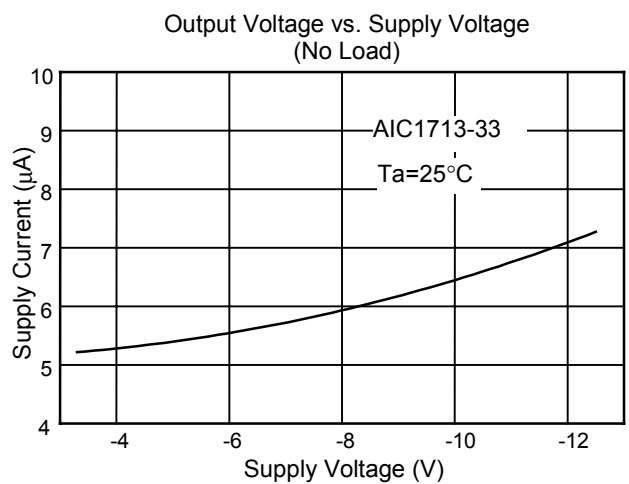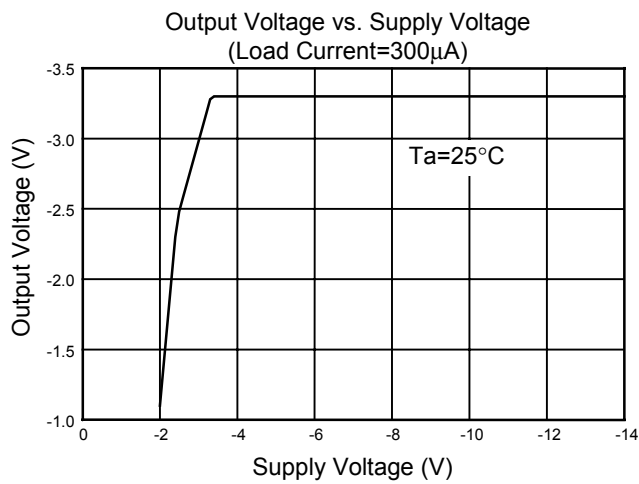


■ **TYPICAL PERFORMANCE CHARACTERISTICS** (Continued)

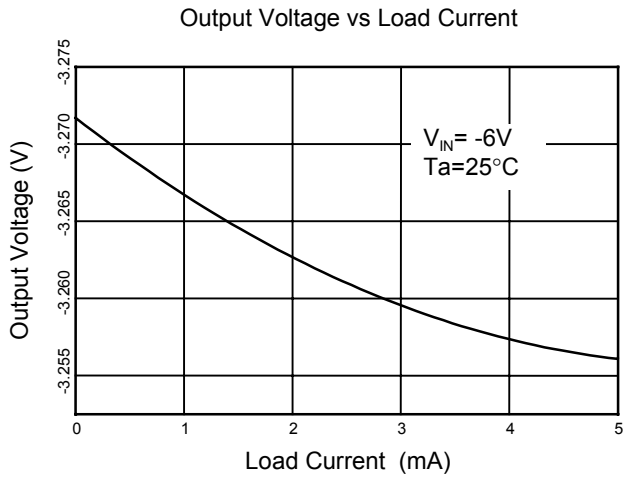

■ **PHYSICAL DIMENSIONS**

- SOT-89 (unit: mm)

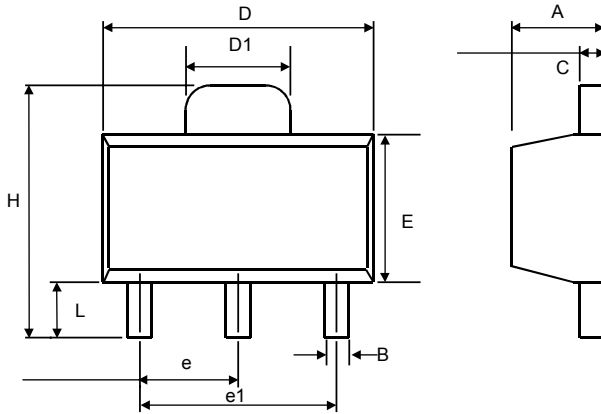


| SYMBOL | MIN | MAX |
|--------|-------------|------|
| A | 1.40 | 1.60 |
| B | 0.36 | 0.48 |
| C | 0.35 | 0.44 |
| D | 4.40 | 4.60 |
| D1 | 1.62 | 1.83 |
| E | 2.29 | 2.60 |
| e | 1.50 (TYP.) | |
| e1 | 3.00 (TYP.) | |
| H | 3.94 | 4.25 |
| L | 0.89 | 1.20 |

- SOT89 Marking

| Part No. | Marking |
|------------|---------|
| AIC1714-30 | AP30 |
| AIC1714-33 | AP33 |
| AIC1714-50 | AP50 |

● TO-92 (unit: mm)

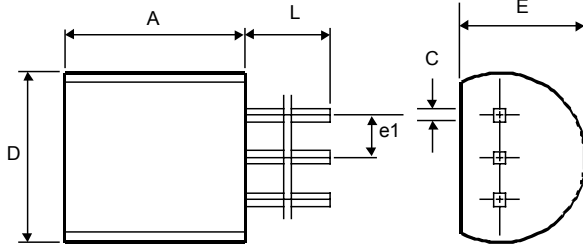

| SYMBOL | MIN | MAX |
|--------|-------------|------|
| A | 4.32 | 5.33 |
| C | 0.38 (TYP.) | |
| D | 4.40 | 5.20 |
| E | 3.17 | 4.20 |
| e1 | 1.27 (TYP.) | |
| L | 12.7 | - |