


SURFACE MOUNTABLE INPUT RECTIFIER DIODE

Description/Features

The 20ETS.. rectifier series has been optimized for very low forward voltage drop, with moderate leakage. The glass passivation technology used has reliable operation up to 150°C junction temperature.

Typical applications are in input rectification and these products are designed to be used with International Rectifier Switches and Output Rectifiers which are available in identical package outlines.



$$V_F < 1V @ 10A$$

$$I_{FSM} = 300A$$


$$V_{RRM} 800 \text{ to } 1600V$$

Output Current in Typical Applications

	Single-phase Bridge	Three-phase Bridge	Units
Capacitive input filter $T_A = 55^\circ\text{C}$, $T_J = 125^\circ\text{C}$, common heatsink of 1°C/W	16.3	21	A

Major Ratings and Characteristics

Characteristics	20ETS..	Units
$I_{F(AV)}$ Sinusoidal waveform	20	A
V_{RRM}	800 to 1600	V
I_{FSM}	300	A
V_F @ 10 A, $T_J = 25^\circ\text{C}$	1.0	V
T_J	-40 to 150	$^\circ\text{C}$

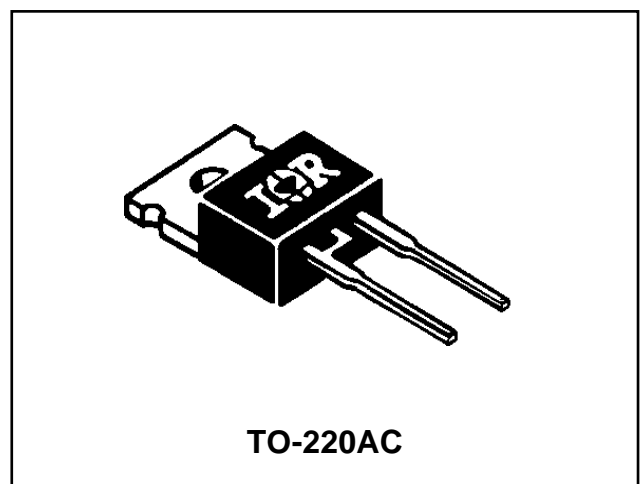

Also available in SMD-220 package (series 20ETS..S)

Voltage Ratings

Part Number	V_{RRM} , maximum peak reverse voltage V	V_{RSM} , maximum non repetitive peak reverse voltage V	I_{RRM} 150°C mA
20ETS08	800	900	1
20ETS12	1200	1300	
20ETS16	1600	1700	

Provide terminal coating for voltages above 1200V

Absolute Maximum Ratings

Parameters	20ETS..	Units	Conditions
$I_{F(AV)}$ Max. Average Forward Current	20	A	50% duty cycle @ $T_C = 105^\circ\text{C}$, sinusoidal wave form
I_{FSM} Max. Peak One Cycle Non-Repetitive Surge Current	250	A	10ms Sine pulse, rated V_{RRM} applied
	300		10ms Sine pulse, no voltage reapplied
I^2t Max. I^2t for fusing	316	A^2s	10ms Sine pulse, rated V_{RRM} applied
	442		10ms Sine pulse, no voltage reapplied
$I^2\sqrt{t}$ Max. $I^2\sqrt{t}$ for fusing	3160	$A^2\sqrt{s}$	$t = 0.1$ to 10ms, no voltage reapplied

Electrical Specifications

Parameters	20ETS..	Units	Conditions
V_{FM} Max. Forward Voltage Drop	1.1	V	@ 20A, $T_J = 25^\circ\text{C}$
r_t Forward slope resistance	10.4	$m\Omega$	$T_J = 150^\circ\text{C}$
$V_{F(TO)}$ Threshold voltage	0.85	V	
I_{RM} Max. Reverse Leakage Current	0.1	mA	$T_J = 25^\circ\text{C}$
	1.0		$T_J = 150^\circ\text{C}$
			$V_R = \text{rated } V_{RRM}$

Thermal-Mechanical Specifications

Parameters	20ETS..	Units	Conditions
T_J Max. Junction Temperature Range	-40 to 150	$^\circ\text{C}$	
T_{stg} Max. Storage Temperature Range	-40 to 150	$^\circ\text{C}$	
R_{thJC} Max. Thermal Resistance Junction to Case	1.3	$^\circ\text{C/W}$	DC operation
R_{thJA} Max. Thermal Resistance Junction to Ambient	62	$^\circ\text{C/W}$	
R_{thCS} Typ. Thermal Resistance Case to Ambient	0.5	$^\circ\text{C/W}$	Mounting surface, smooth and greased
wt Approximate Weight	2 (0.07)	g (oz.)	
T Mounting Torque	Min.	6 (5)	Kg-cm (lbf-in)
	Max.	12 (10)	
Case Style	TO-220AC		

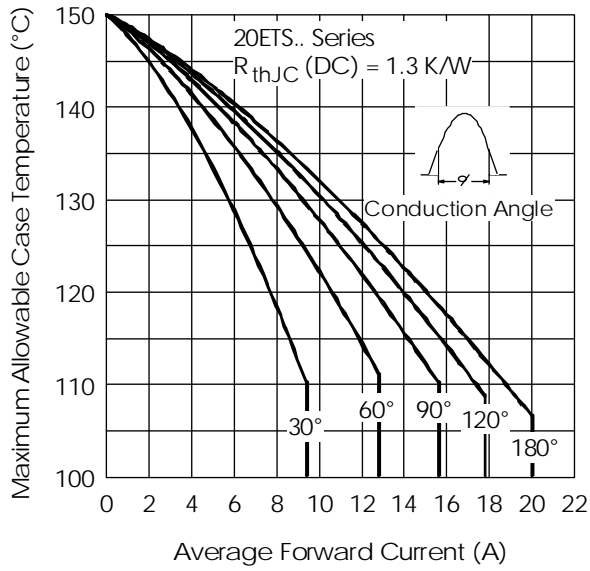


Fig. 1 - Current Rating Characteristics

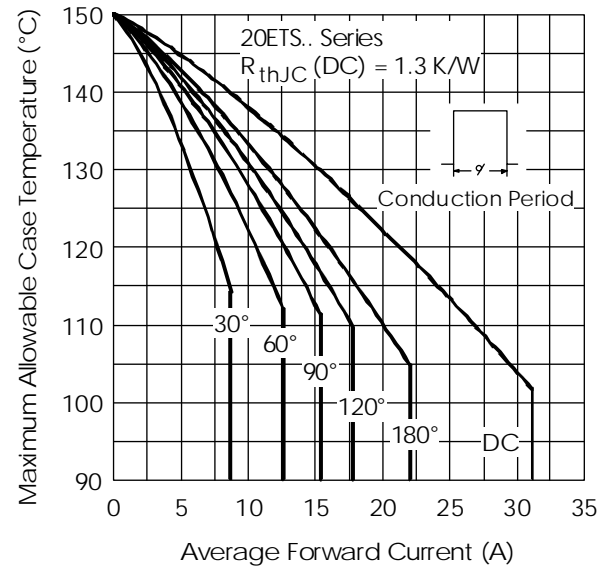


Fig. 2 - Current Rating Characteristics

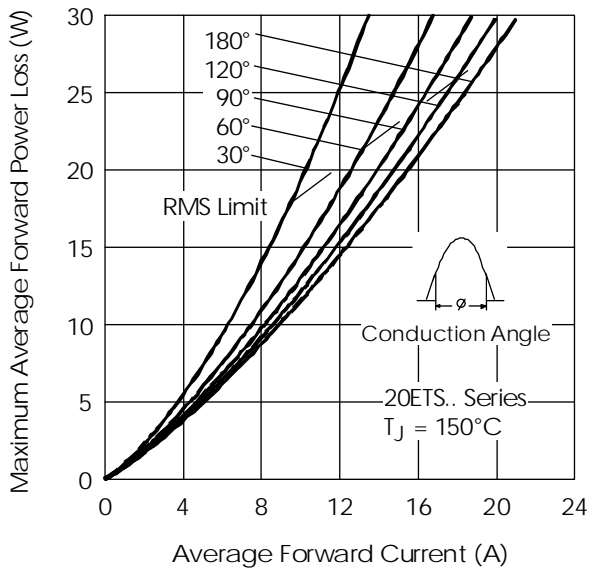


Fig. 3 - Forward Power Loss Characteristics

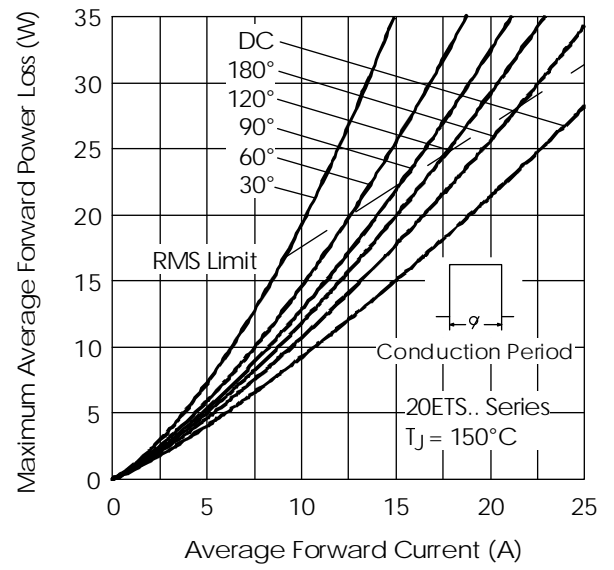


Fig. 4 - Forward Power Loss Characteristics

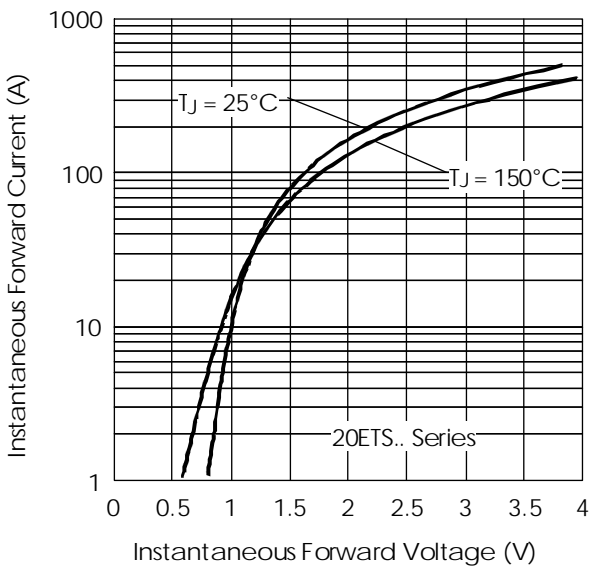


Fig. 5 - Forward Voltage Drop Characteristics

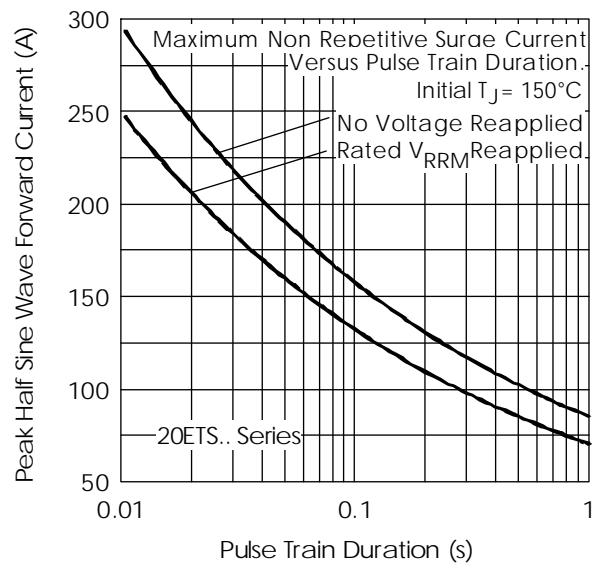


Fig. 6 - Maximum Non-Repetitive Surge Current


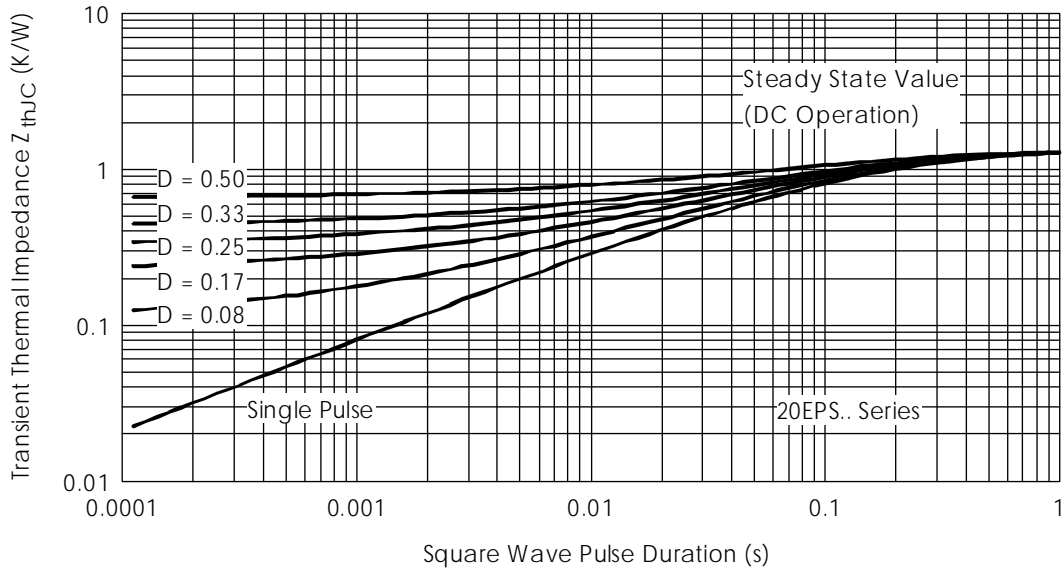



Fig. 7 - Thermal Impedance Z_{thJC} Characteristics

Outline Table

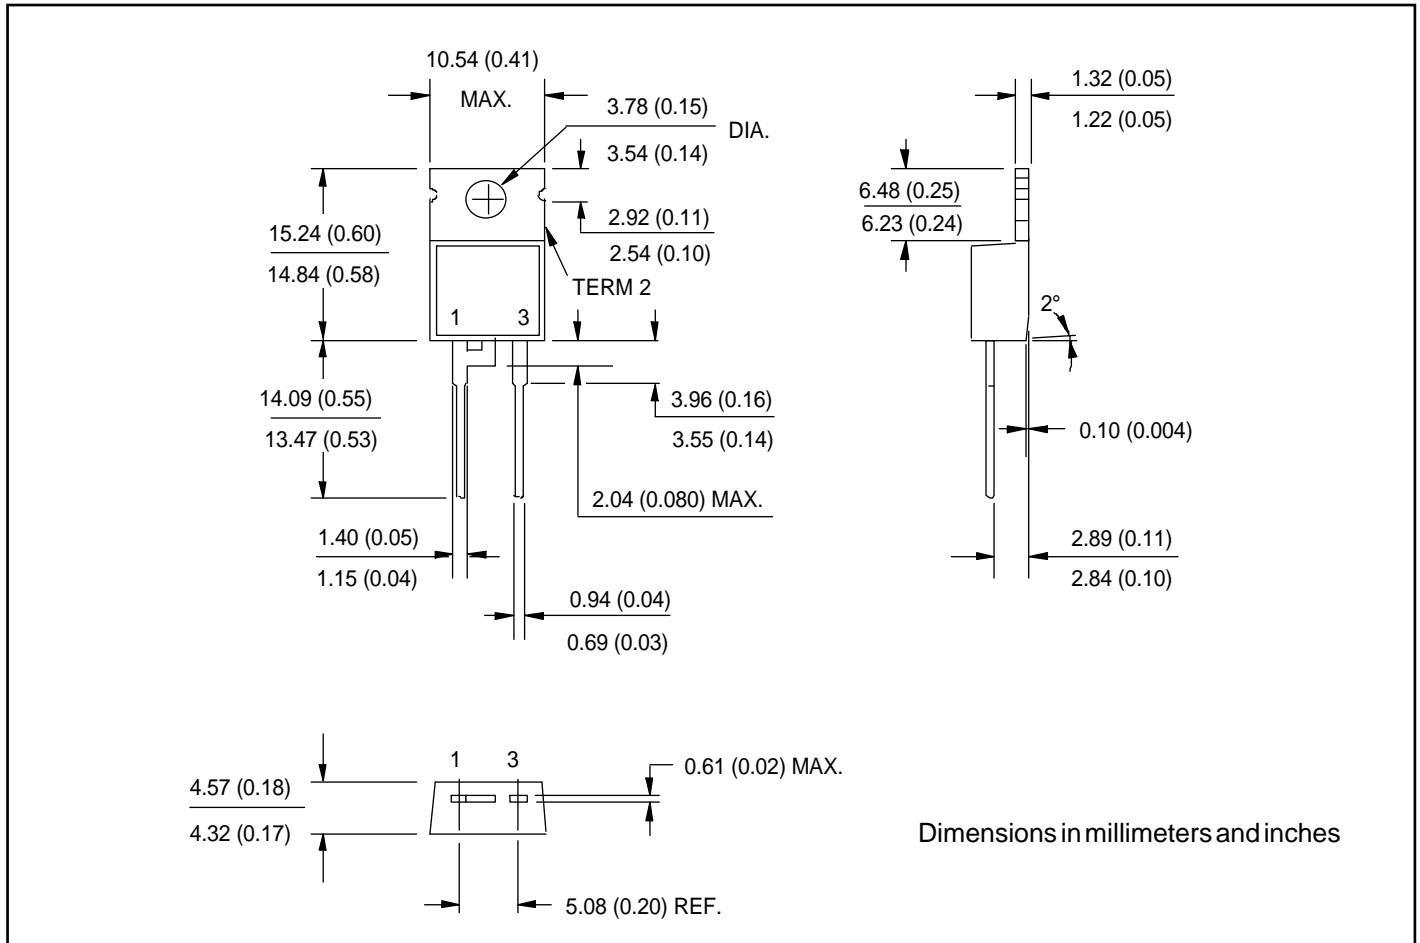


Ordering Information Table

Device Code

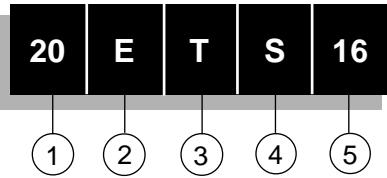

- 1** - Current Rating
- 2** - Circuit Configuration
E = Single Diode
- 3** - Package
T = TO-220AC
- 4** - Type of Silicon
S = Standard Recovery Rectifier
- 5** - Voltage code: Code x 100 = V_{RRM}

08 = 800V
12 = 1200V
16 = 1600V



International Rectifier

WORLD HEADQUARTERS:	233 Kansas St., EL SEGUNDO , CA 90245 U.S.A. Tel: (310) 322-3331. Fax: (310) 322-3332.
EUROPEAN HEADQUARTERS:	Hurst Green, OXTED , Surrey RH8 9BB, UK. Tel: (0883) 713215. Tlx: 95219. Fax: (0883) 714234.
CANADA:	7231 Victoria Park Ave, Suite #201, Markham, ONTARIO L3R 2Z8. Tel: (905) 475-1897. Fax: (905) 475-8801.
CZECHOSLOVAKIA:	Macurova 19/1565, Box 30, 149 00 PRAGUE . Tel: (2) 792-6831. Fax: (2) 792-6831.
DENMARK:	P.O. Box 88, Telefonvej 8, DK-2860 SOEBORG . Tel: (45) 39 57 71 50. Fax: (45) 39 57 71 52.
FRANCE:	132 Rue de Petit Vaux, 91360 EPINAY sur ORGE . Tel: (1) 6454-8329. Tlx: 600943. Fax: (1) 6454-8330.
FINLAND:	Billskogsvagen 19, 02580 Sjunde St. Tel: (0) 262-8144. Fax: (0) 262-8150.
GERMANY:	Saalburgstr. 157, D-6380 BAD HOMBURG . Tel: (61) 723-7066. Tlx: 410404. Fax: (61) 723-7065.
HUNGARY:	Szent Istvan Park 15, H-1137 BUDAPEST . Tel/Fax: (36) 1 129 1854.
HONG KONG:	202 Peter Building, 60 Queen's Road Central, HONG KONG . Tel: (85) 252-36355. Fax: (85) 284-52908.
ITALY:	Via Liguria 49, 10071 Borgaro, TORINO . Tel: (011) 4510-111. Tlx: 221257. Fax: (011) 4510-220. Via Zucca 8, 20017 Rho, MILANO . Tel: (02) 9350-3650. Fax: (02) 9350-3655. Via Arno 1, 40139 BOLOGNA . Tel: (051) 493-307. Fax: (051) 495-480.
INDIA:	Unit 23, SDF 1, Seepz, Andheri (East), BOMBAY 400 096. Tel: 822 1055. Fax: (91) 22 838 0473.
JAPAN:	K & H Bldg. 2F, 3-30-4 Nishi-Ikebukuro, Toshima-ku, TOKYO , Japan 171. Tel: (03) 983-0641. Fax: (03) 983-0642.
KOREA:	Saku Bldg. #2020, 16-49 Hankang-ro 3ka, Youngsan-gu, SEOUL 140-202. Tel: (2) 705-1280. Fax: (2) 705-1279.
POLAND:	UL Gwiazdzista 13/100, 01-651 WARSAWA . Tel:/Fax: (022) 69-82-95.
SINGAPORE:	315 Outram Road, # 10-02 Tan Boon Liat Building, SINGAPORE 0316. Tel: 65 221 8371. Fax: 65 221 8372.
SWEDEN:	Box 8159, S-163 08 Spanga, STOCKHOLM . Tel: (46) 8 795 9840. Fax: (46) 8 795 9895.
SWITZERLAND:	Cherstr. 4, CH-8152 ZURICH , Opfikon, Tel: (41) 1 874 6295. Fax: (41) 1 874 6299.
U.S.A.:	
Central Zone:	1851 Hicks Road, Suite C, ROLLING MEADOWS , IL 60008. Tel: (708) 934-0020. Fax: (708) 934-0452.
Eastern Zone:	130 Commons Court, CHADDS FORD , PA 19317. Tel: (215) 358-5153. Fax: (215) 358-5172.
Southern Zone:	800 Office Plaza Blvd., Suite 403, KISSIMMEE , FL 34744. Tel: (407) 933-2383. Fax: (407) 933-2293.
Western Zone:	1521 Grand Avenue, EL SEGUNDO , CA 90245. Tel: (310) 607-8886. Fax: (310) 640-8116.

Sales Offices, Agents and Distributors in Major Cities throughout the World.