


Screw clamping terminal block-  
UKHV-2.5 / 1 × 2JD- 011435

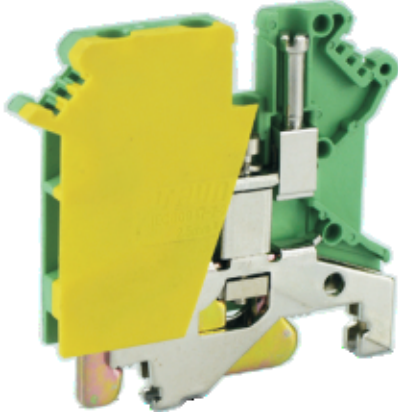


Screw clamping terminal block, connection method : screw connection , number of connections : 3 , crimping range : 0.2mm<sup>2</sup> -2.5mm<sup>2</sup> , AWG : 24-14, thickness:5.2mm , height:50.5mm , color : yellow-green , mounting type : TH35-7.5、 TH35-15、 G32-15、 G32-18

Product parameter

Parameter	Data
Packing unit (PCS)	80
NW per piece(g)	/
Layers	1
Number of connections	3
Rated cross section(mm <sup>2</sup> )	2.5
Color	yellow-green
Insulation material	PA
Flame retardant grade ( UL94 )	V0
Rated voltage(V)	/
Rated current(A)	/
Temperature of insulation material	-40 ~ +125
Wire feed	Terminal side

Product certification

Parameter	Data
Certification logo	

Technical data

Parameter	Data

Parameter	Data
Connection Method	Screw connection
Screw thread	M3
Stripping length(mm)	8mm
Tightening torque	0.6-0.8Nm
Solid conductors(mm <sup>2</sup> )	0.2-2.5
Solid conductors AWG	24-14
Stranded conductors(mm <sup>2</sup> )	0.2-2.5
Stranded conductors AWG	24-14
Operating temperature ( )	-40 ~ +105
Ambient temperature (storage/transportation) ( )	-25 ~ +60
Relative humidity	30% ~ 90%
Connection in acc. with standard	IEC 60947-7-1

## Dimension

Parameter	Data
Width(mm)	50.5
Thickness(mm)	5.2
Height(mm)	50.5