
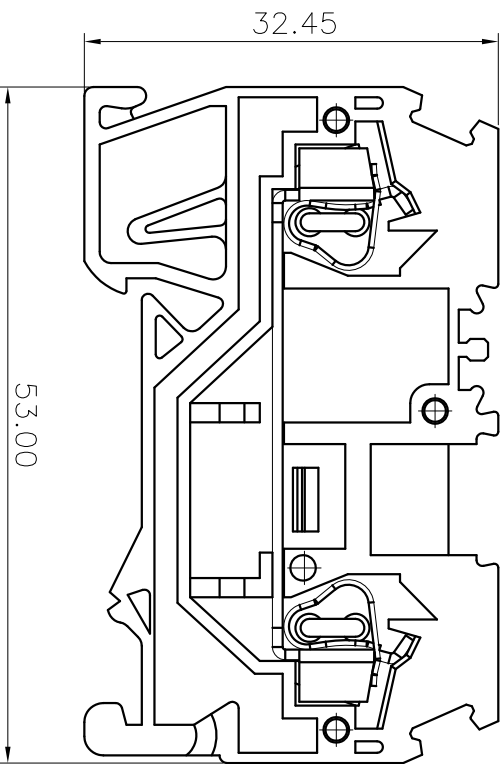
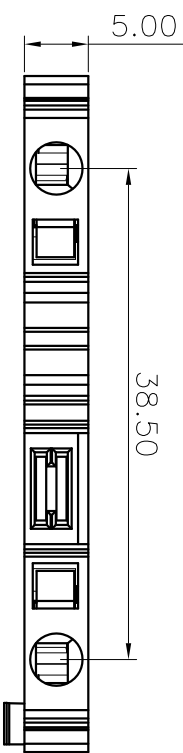


REVISION RECORD			
REV	ECN	DESCRIPTION	DRFT DATE

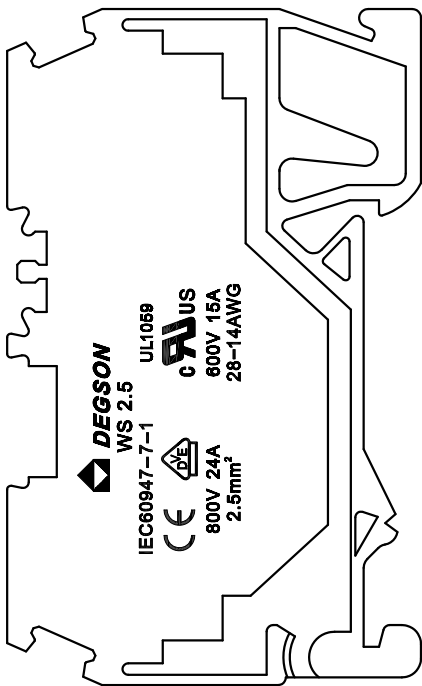

NOTES:

- UL Standard
- 1. Rated voltage/current : 600V / 15A
- 2. Withstanding voltage : AC2200V/1Min.
- 3. Wire range : 28~14AWG

IEC Standard

1. Pollution degree	3
Overvoltage category	III
Rate impulse voltage(KV)	8.0KV
Rate voltage(V)	800 V
Rate current(A)	24 A


2. Wire range : 0.2~2.5mm²

NOTES2:

- 1. Dimension shall be interpreted per ASME Y14.5-2009
- 2. Pitch : 5mm, Poles : 01P
- 3. Stripping length : 8~9mm
- 4. Operating temperature: -40°C~+105°C
- 5. Undimensioned tolerances:

Pitch range	in mm		Nominal dimension range		- / Δ
	Over	TO	Over	Over	
6	10	10	30	60	0.1/10
10	10	24	30	60	150
15	10	24	60	100	150
20	10	24	60	100	150
25	10	24	60	100	150
30	10	24	60	100	150
40	10	24	60	100	150
50	10	24	60	100	150
60	10	24	60	100	150
70	10	24	60	100	150
80	10	24	60	100	150
90	10	24	60	100	150
100	10	24	60	100	150
110	10	24	60	100	150
120	10	24	60	100	150
130	10	24	60	100	150
140	10	24	60	100	150
150	10	24	60	100	150
160	10	24	60	100	150
170	10	24	60	100	150
180	10	24	60	100	150
190	10	24	60	100	150
200	10	24	60	100	150
210	10	24	60	100	150
220	10	24	60	100	150
230	10	24	60	100	150
240	10	24	60	100	150
250	10	24	60	100	150
260	10	24	60	100	150
270	10	24	60	100	150
280	10	24	60	100	150
290	10	24	60	100	150
300	10	24	60	100	150
310	10	24	60	100	150
320	10	24	60	100	150
330	10	24	60	100	150
340	10	24	60	100	150
350	10	24	60	100	150
360	10	24	60	100	150
370	10	24	60	100	150
380	10	24	60	100	150
390	10	24	60	100	150
400	10	24	60	100	150
410	10	24	60	100	150
420	10	24	60	100	150
430	10	24	60	100	150
440	10	24	60	100	150
450	10	24	60	100	150
460	10	24	60	100	150
470	10	24	60	100	150
480	10	24	60	100	150
490	10	24	60	100	150
500	10	24	60	100	150
510	10	24	60	100	150
520	10	24	60	100	150
530	10	24	60	100	150
540	10	24	60	100	150
550	10	24	60	100	150
560	10	24	60	100	150
570	10	24	60	100	150
580	10	24	60	100	150
590	10	24	60	100	150
600	10	24	60	100	150
610	10	24	60	100	150
620	10	24	60	100	150
630	10	24	60	100	150
640	10	24	60	100	150
650	10	24	60	100	150
660	10	24	60	100	150
670	10	24	60	100	150
680	10	24	60	100	150
690	10	24	60	100	150
700	10	24	60	100	150
710	10	24	60	100	150
720	10	24	60	100	150
730	10	24	60	100	150
740	10	24	60	100	150
750	10	24	60	100	150
760	10	24	60	100	150
770	10	24	60	100	150
780	10	24	60	100	150
790	10	24	60	100	150
800	10	24	60	100	150
810	10	24	60	100	150
820	10	24	60	100	150
830	10	24	60	100	150
840	10	24	60	100	150
850	10	24	60	100	150
860	10	24	60	100	150
870	10	24	60	100	150
880	10	24	60	100	150
890	10	24	60	100	150
900	10	24	60	100	150
910	10	24	60	100	150
920	10	24	60	100	150
930	10	24	60	100	150
940	10	24	60	100	150
950	10	24	60	100	150
960	10	24	60	100	150
970	10	24	60	100	150
980	10	24	60	100	150
990	10	24	60	100	150
1000	10	24	60	100	150

6. RoHS Compliance

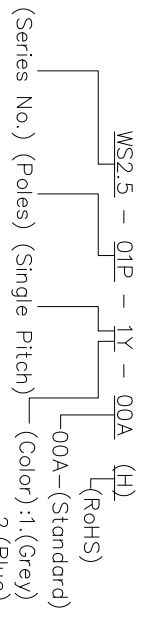

- 1. (Grey)
- 2. (Blue)
- 3. (Black)
- 4. (Green)
- 5. (Orange)
- 6. (Red)
- 7. (Transparent)
- 8. (Yellow)
- 9. (White)

DETACHED LISTS			
PART NO.:	/	NAME:	DEGSON [®] NINGBO DEGSON ELECTRICAL CO., LTD
APPD:	/	APPD:	宁波高松电子有限公司
CHKD:	/	CHKD:	WS2.5-01P-1Y-00A(H)
DRFT:	/	DRFT:	CUSTOMER DRAWING
THIRD ANGLE PROJECTION		DRAWING NO.:	/
		DO NOT SCALE DRAWING	SCALE
		SCALE	1:1