
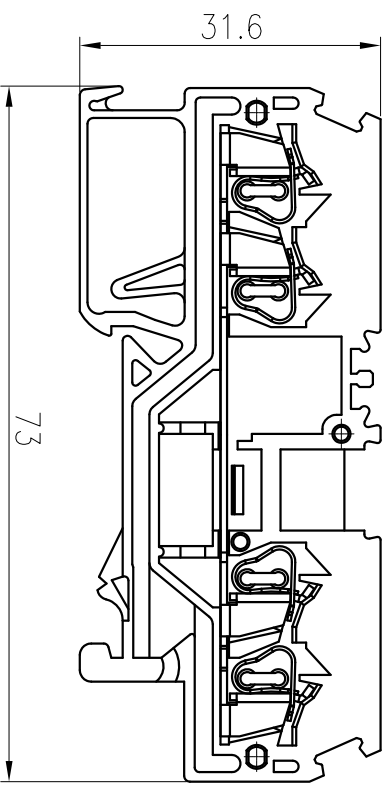



REVISION RECORD			
REV	ECN	DESCRIPTION	DRFT DATE

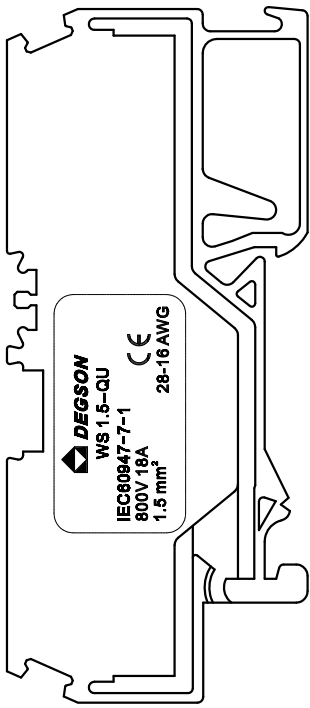

Pollution degree	3
Overvoltage category	III
Rate impulse voltage(KV)	80KV
Rate voltage(V)	800V
Rate current(A)	18 A


- NOTES:
- UL Standard
1. Rated voltage/current : 600V / 10A
 2. Withstanding voltage : AC2200V/1Min.
 3. Wire range : 28~16AWG
- IEC Standard
1. Pollution degree

2. Wire range : 0.2~1.5mm²

- NOTES2:
1. Dimension shall be interpreted per ASME Y14.5-2009
 2. Pitch : 4.0mm, Poles : 01P
 3. Stripping length : 9~10mm
 4. Operating temperature: -40°C~+105°C
 5. Undimensioned tolerances:

Pitch range in mm	Nominal dimension range in mm		±2°
	Over	Over	
6	10	100	0.1/10
10	10	100	<
24	30	60	1.50
30	60	100	1.30
±0.15/±0.20/±0.30	±0.30/±0.50/±0.70	±1.00/±1.30	

6. RoHS Compliance

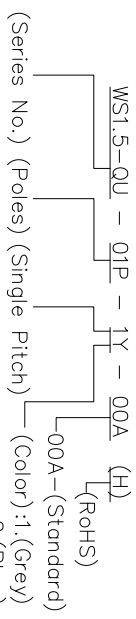

- (Series No.) (Poles) (Single Pitch) (Color): 1. (Grey)
 2. (Blue)
 3. (Black)
 4. (Green)
 5. (Orange)
 6. (Red)
 7. (Transparent)
 8. (Yellow)
 9. (White)

DETACHED LISTS			
PART NO.:	/	NAME:	DEGSON [®] NINGBO DEGSON ELECTRICAL CO., LTD 宁波高松电子有限公司
APPD:	/	DRFT:	REV
CHKD:	/	TITLE:	CUSTOMER DRAWING
DRFT:	/	DRAWING NO.:	SHEET
THIRD ANGLE PROJECTION		DO NOT SCALE DRAWING	SCALE
			1:1

A 8 7 6 5 4 3 2 1

A B C D E F G H