
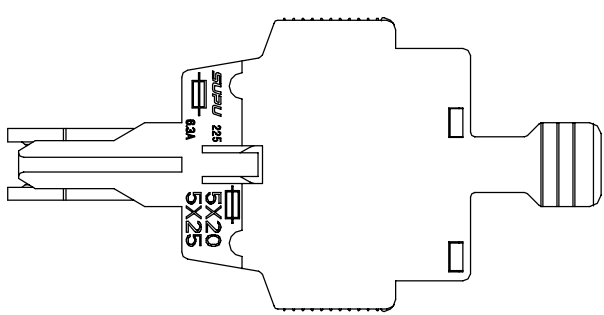


REVISION RECORD			
REV	ECN	DESCRIPTION	DATE

Transmittal, reproduction, dissemination and/or editing of this document as well as utilization of its contents and communication thereof to others without express authorization are prohibited.

未经允许禁止传输、复制、编辑该文档，以及利用其内容进行交流

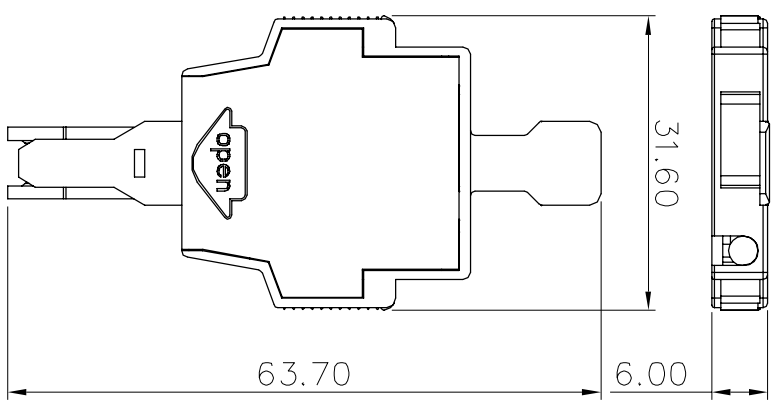

Material:

Insulator	PAG6	UL94 V-0
Spring	Stainless steel	
Conductor	Copper alloy	Sn plated

NOTES:
 UL/CUL Standard
 1. Rated Voltage/Current :

Use group	B	C	D
Rated voltage(V)	600	600	
Rated current(A)	20	20	

1. Rated Voltage/Current :

Surge voltage category	III
Pollution degree	3
Rated surge voltage(KV)	8
Rated voltage(V)	800
Rated current(A)	24

General information:
 1. Dimension shall be interpreted per ASME Y14.5-2009
 2. Fuse : 5X20 5X30
 3. Operating temperature: -40°C~+105°C
 4. RoHS Compliance
 5. Undimensioned Tolerances:

Pitch Range	in	Nominal Dimension	Range	mm					
Over	6	Over	30	Over	60	Over	100	Over	150
TO	10	TO	30	TO	60	TO	100	TO	150
TO	10	TO	24	TO	30	TO	60	TO	100
TO	10	TO	24	TO	30	TO	60	TO	100

HOW TO ORDER:
 225232

Series Voltage: 24
 No.

Order No	225232	名称	225232 保险管盒	未注公差	表面
项目	签字	图号	225232	Tolerances Table	VDI21
设计	c.js	材料	Notes	版本号	重量
审核	df	Material		Revision Number	比例
工艺	-	物料号		M1	Scale
标准化	-	Item No.			1:1
批准	1w1				mm
批准	04/07/20"				

第1页/共1页 1 of 1
SUPU 宁波普电子有限公司
 NINGBO SUPU ELECTRONICS CO.,LTD.