


Spring-cage connection terminal block- UJ5-2.5WV/2-2JD-421140

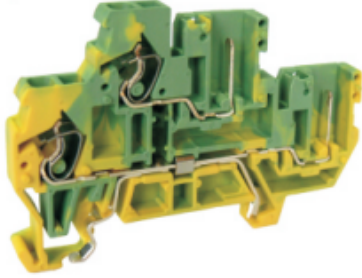

Spring-cage connection terminal block , connection method:spring-cage connection, number of connection : 2 , crimping range : 0.2mm² -4mm² , AWG:24-12 thickness:5mm , height:46.5mm , color : yellow green , mounting type : TH35-7.5、 TH35-15。

Product parameter

Parameter	Data
Packing unit(pcs)	60
NW per piece(g)	10.4
Layers	2
Number of connections	2
Rated cross section(mm ²)	2.5
Color	Yellow green
Insulation material	PA
Flame retardant grade	V0
Rated voltage(V)	/
Rated current(A)	/
Temperature of insulation material	-40 ~ +125
Wire feed	Above the terminal

Product certification

Parameter	Data
Certification logo	CE
Certification logo	RoHS

Technical data

Parameter	Data
Connection Method	Spring-cage connection
Stripping length(mm)	7
Solid conductors(mm ²)	0.2-4
Solid conductors AWG(mm ²)	24-12
Operating temperature ()	-40 ~ +105
Ambient temperature (storage/transportation) ()	-25 ~ +55
Relative humidity	30% ~ 90%
Stranded conductors(mm ²)	0.2-2.5
Stranded conductors AWG	24-12
Connection in acc. with standard	IEC 60947-7-2

Dimension

Parameter	Data
Width (mm)	70
Thickness (mm)	5
Height (mm)	46.5