


## Screw clamping terminal block- UKHV-6S- 011364



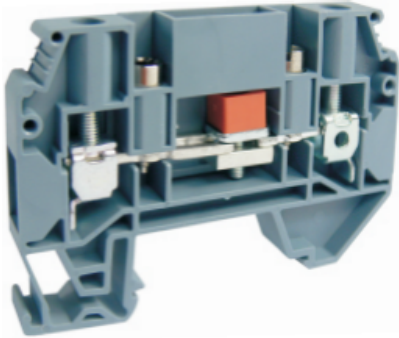


Screw clamping terminal block , rated voltage:1000V , Max. operating current:41A, connection method : screw connection , number of connections : 2 , crimping range : 0.5mm<sup>2</sup> -10mm<sup>2</sup> , AWG : 20-8, thickness:8.2mm , height:51.7mm , color : grey , mounting type : TH35-7.5、 TH35-15、 G32-15、 G32-18

## Product parameter

Parameter	Data
Packing unit (PCS)	60
NW per piece(g)	27.85
Layers	1
Number of connections	2
Rated cross section(mm <sup>2</sup> )	6
Color	grey
Insulation material	PA
Flame retardant grade ( UL94 )	V0
Rated voltage(V)	1000
Rated current(A)	41
Temperature of insulation material	-40 ~ +125
Wire feed	Terminal side

## Product certification

Parameter	Data
Certification logo	
Certification logo	
Certification logo	

Parameter	Data
	<b>IECE<sub>x</sub></b>
Certification logo	

## Technical data

Parameter	Data
Connection Method	Screw connection
Screw thread	M3.5
Stripping length(mm)	16
Tightening torque	0.8-1.3
Solid conductors(mm <sup>2</sup> )	0.5-10
Solid conductors AWG	20-8
Stranded conductors(mm <sup>2</sup> )	1.5-6
Stranded conductors AWG	20-8
Operating temperature ( )	-40 ~ +105
Ambient temperature (storage/transportation) ( )	-25 ~ +60
Relative humidity	30% ~ 90%
Connection in acc. with standard	IEC 60947-7-1

## Dimension

Parameter	Data
Width(mm)	72.5
Thickness(mm)	8.2
Height(mm)	51.7