


Screw clamping terminal block-  
UKJ-16JD- 011011





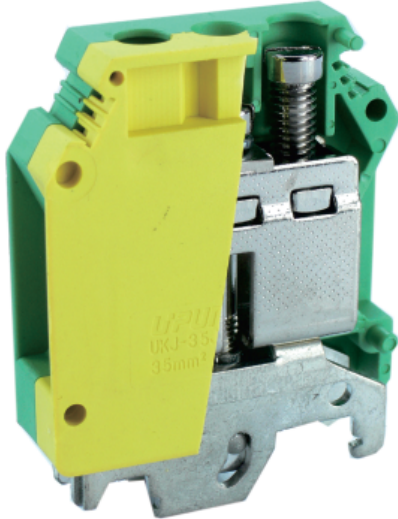


Screw clamping terminal block, connection method : screw connection , number of connections : 2 , crimping range : 2.5mm<sup>2</sup> -25 mm<sup>2</sup> , thickness:12.5mm , height:50.6mm , color : yellow-green , mounting type : TH35-7.5、 TH35-15、 G32-15、 G32-18

Product parameter

Parameter	Data
Packing unit (PCS)	60
NW per piece(g)	2.27
Layers	1
Number of connections	2
Rated cross section(mm <sup>2</sup> )	25
Color	yellow-green
Insulation material	PA
Flame retardant grade ( UL94 )	V0
Temperature of insulation material	-40 ~ +125
Wire feed	Left and right side of the terminal

Product certification

Parameter	Data
Certification logo	
Certification logo	

Parameter	Data
	
Certification logo	
Certification logo	
Certification logo	

## Technical data

Parameter	Data
Connection Method	Screw connection
Screw thread	M4
Stripping length(mm)	11
Tightening torque	1.5-1.8
Solid conductors(mm <sup>2</sup> )	2.5-25
Stranded conductors(mm <sup>2</sup> )	4-16
Operating temperature ( )	-40 ~ +105
Ambient temperature (storage/transportation) ( )	-25 ~ +60
Relative humidity	30% ~ 90%
Connection in acc. with standard	IEC 60947-7-1

## Dimension

Parameter	Data
Width(mm)	42.5
Thickness(mm)	12.5
Height(mm)	50.6