
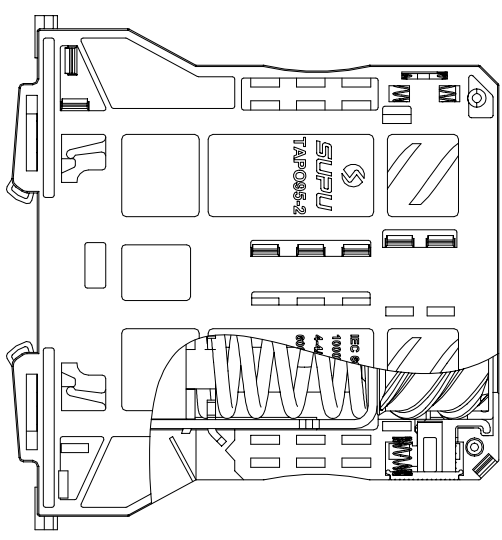
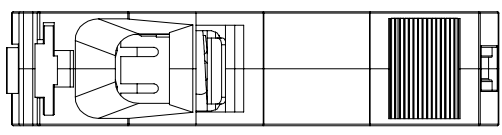
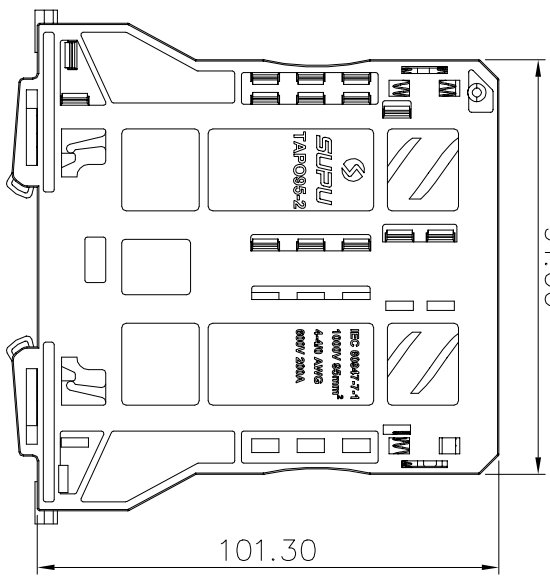


REVISION RECORD			
REV	ECN	DESCRIPTION	DATE

Connection method:
 1. For Solid wire, peeling wire in right length, push down the wire.
 2. For Stranded wire, peeling wire in right length, push down the key & fix the wire, or wire ferruled and fix them.

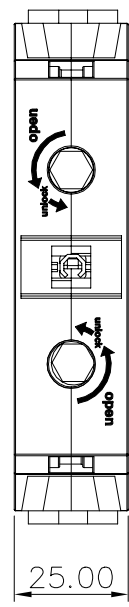

Transmittal, reproduction, dissemination and/or editing of this document as well as utilization of its contents and communication thereof to others without express authorization are prohibited.

未经允许禁止传输、复制、编辑该文档，以及利用其内容进行交流

HOW TO ORDER:
TAP095-2-XX

Series No. Color:
 GY: Grey
 BU: Blue
 OG: Orange

NOTES:
UL/CUL Standard

1. Conductor cross section : 4~4/0AWG
 2. Rated Voltage/Current :

Use group	B	C	D
Rated voltage(V)	600	600	600
Rated current(A)	200	200	200

IEC Standard
 1. Conductor cross section :

Wire range(Solid/Stranded)	25-95mm ²	25-95mm ²
Solid	25-95mm ²	25-95mm ²
Stranded	25-95mm ²	25-95mm ²
Stranded with ferrules		
Stranded with plastic sleeve		
Stranded with ferrules with plastic sleeve		

2. Rated Voltage/Current :

Surge voltage category	III
Pollution degree	3
Rated surge voltage(kV)	8
Rated voltage(V)	1000
Rated current(A)	232

Material:

Insulator	PA66	UL94 V-0
Conductor	Copper alloy	Sn plated
Spring	Stainless steel	
Cage	spcc	Zn plated

General information:

1. Dimension shall be interpreted per ASME Y14.5-2009
2. Stripping length : 35mm
3. Operating temperature: -40°C~+105°C
4. ROHS Compliance
5. Undimensioned Tolerances:

Pitch Range	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm
Over	6	10	10	10	30	60	100	100	150	150	150	150
To	10	24	30	60	100	150	150	150	150	150	150	150
	±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30	±2*			

Order No.	Signature	Date	名称	图号	材料	物料号	未注公差	表面
TAP095-2-XX			TAP095弹簧一进一出轨道接线端子	PRM003192	Notes	第1页/共1页 1 of 1	Tolerances Table	Surface VDI21
设计	df	2021.03.19					版本号	重量
审核	df	2021.03.19					Revision Number	比例
工艺	df						M1	Scale
Process	-	-						1:1
标准化	-	-						mm
批准	1w1	2021.03.19						
Approve								

原图号 Old Draw. No. 底图总号 Assembly No. 普通零件登记 Common Part

NINGBO SUPU ELECTRONICS CO., LTD.