


Screw clamping terminal block- UKJ-  
W4JD- 431009



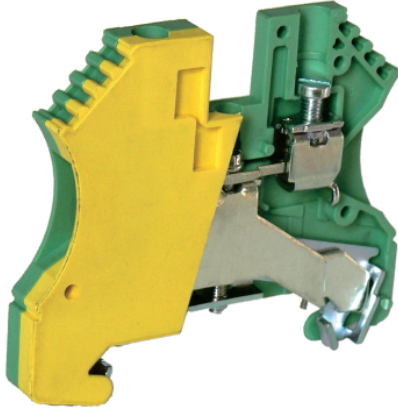

Screw clamping terminal block, connection method : screw connection , number of connections : 2 , crimping range : 0.5mm<sup>2</sup> -6mm<sup>2</sup> , thickness:6.2mm , height:46.6mm , color : yellow-green , mounting type : TH35-7.5、 TH35-15

Product parameter

Parameter	Data
Packing unit (PCS)	57
NW per piece(g)	1.13
Layers	1
Number of connections	2
Rated cross section(mm <sup>2</sup> )	6
Color	yellow-green
Insulation material	PA
Flame retardant grade ( UL94 )	V0
Temperature of insulation material	-40 ~ +125
Wire feed	Both sides of the terminal

Product certification

Parameter	Data
Certification logo	<b>CE</b>
Certification logo	<b>IECEX</b>
Certification logo	

Parameter	Data
	
Certification logo	

## Technical data

Parameter	Data
Connection Method	Screw connection
Screw thread	M3
Stripping length(mm)	10
Tightening torque	0.5-10
Solid conductors(mm <sup>2</sup> )	0.5-6
Stranded conductors(mm <sup>2</sup> )	1.5-4
Operating temperature ( )	-40 ~ +105
Ambient temperature (storage/transportation) ( )	-25 ~ +60
Relative humidity	30% ~ 90%
Connection in acc. with standard	IEC 60947-7-1

## Dimension

Parameter	Data
Width(mm)	60
Thickness(mm)	6.2
Height(mm)	46.6