



Single-shaft without switch type

Number of resistor elements		Single-unit
Mounting direction		Horizontal type
Fixing method of bushing		Screw
Shaft types		Flat
Length of the shaft		25mm
Center detent		Without
Total resistance		10k Ω
Resistance taper		1B
Operating temperature range		-20°C to +70°C
Electrical Performance	Total resistance tolerance	$\pm 20\%$
	Rated power	0.05W
	Maximum operating voltage	50V AC, 10V DC
	Residual resistance	20 Ω max.
	Insulation resistance	100M Ω min. 250V DC
	Voltage proof	300V AC for 1 minute
Mechanical Performance	Total rotational angle	300° $\pm 5^\circ$
	Rotational torque	2 to 25mN·m
	Stopper strength	0.5N·m
	Push-pull strength	100N max.
	Vibration	10 to 55 to 10Hz/min., the amplitude is 1.5mm for all the frequencies, in the 3 direction of X, Y and Z and for 2 hours respectively
Durability	Operating life	15,000 cycles
Minimum order unit (pcs.)	Japan	800
	Export	1,600

Dimensions

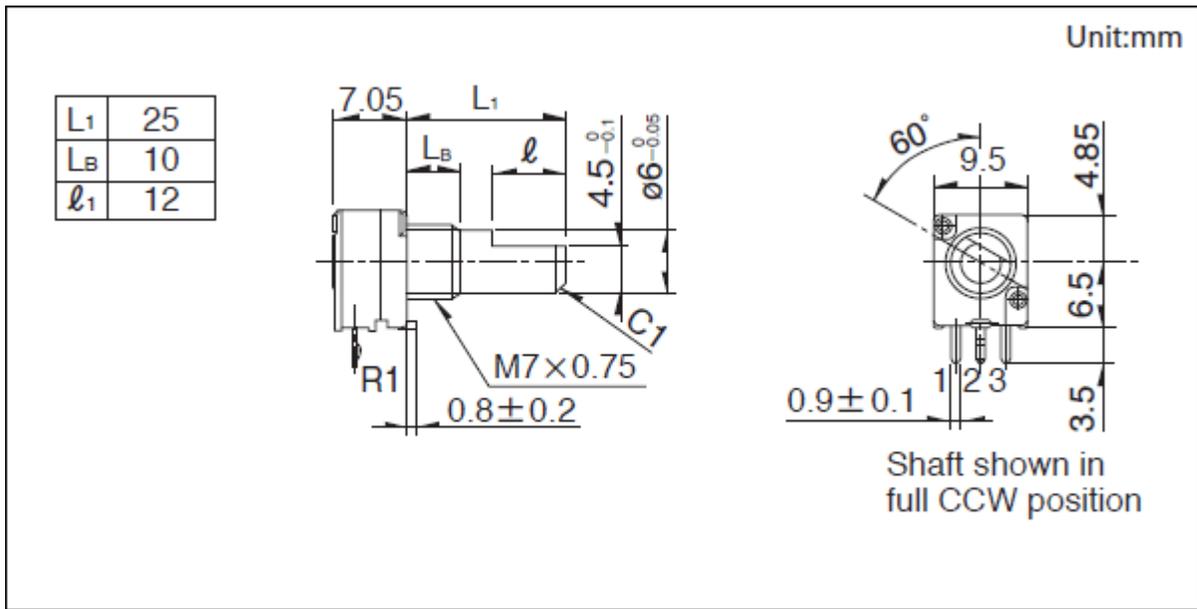


Mounting Hole Dimensions

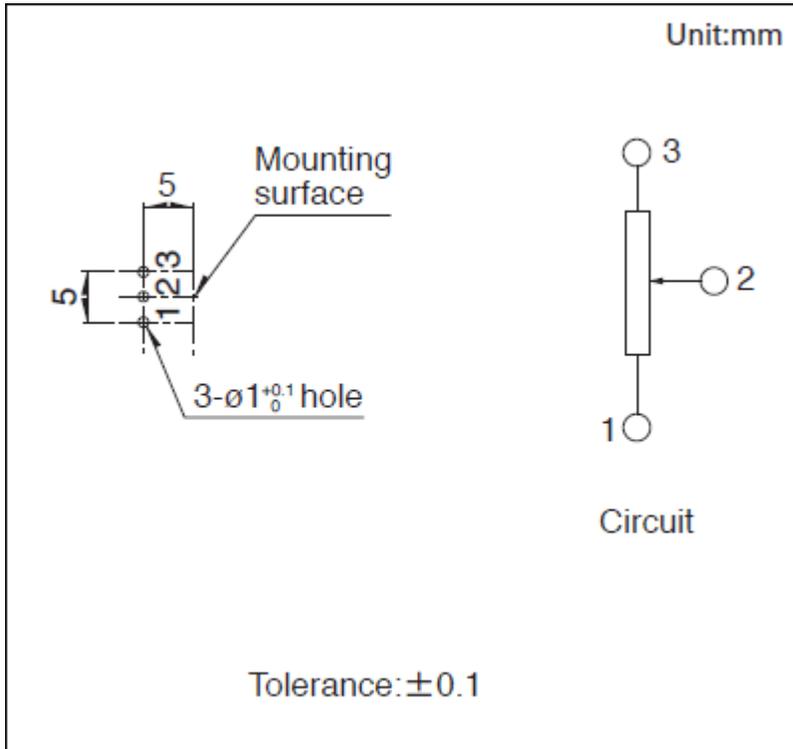


Viewed from mounting side.

Dimensions of Terminal

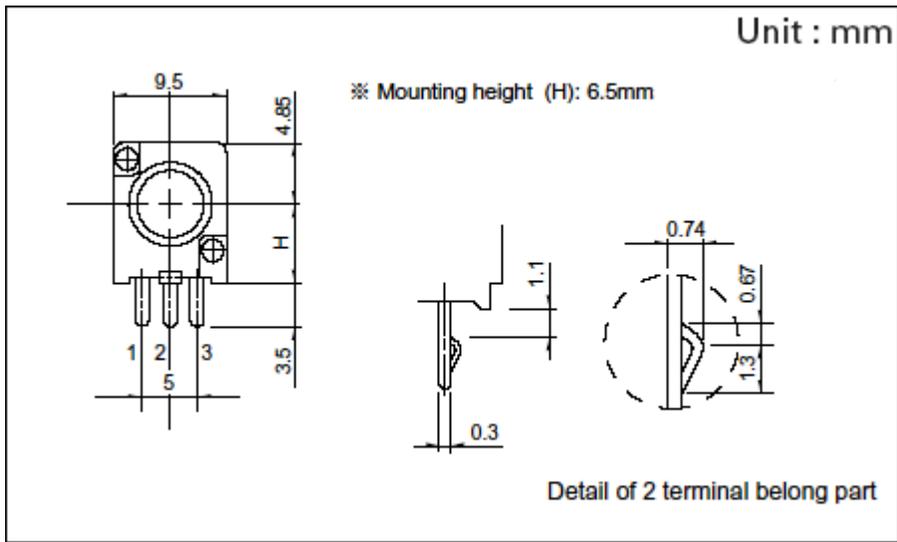


Dimensions of Bushings

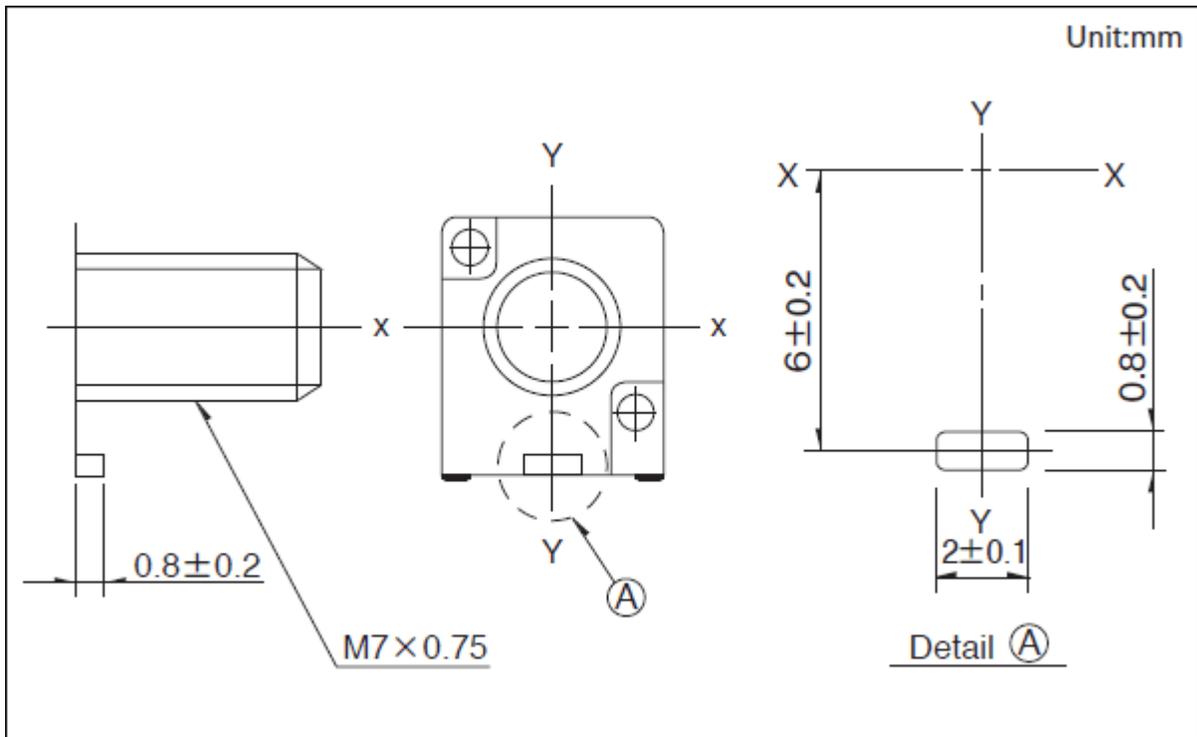


Attached Parts

Nut

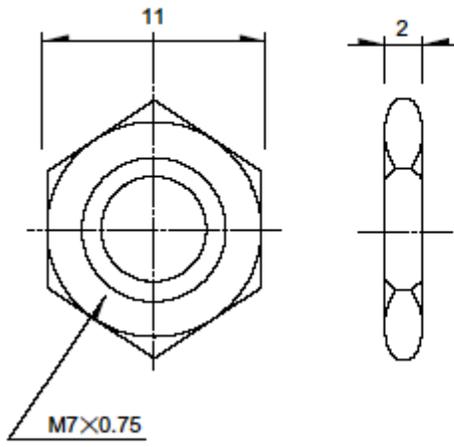

Washer

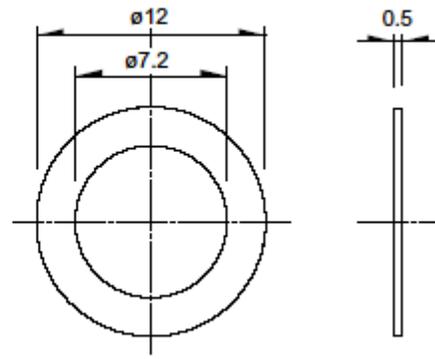

Unit : mm