

## Data sheet

Commercial Art.No.: 94.425.1000.7

Cable assembly BST14I2KFBS 50 10GN01

BST14i2 connection cable female - male, length 1.0 m, 2 pole, coding KNX, 3 A, coding color green, strain relief color black, green, cross section 0.5 mm<sup>2</sup>, cable type FB-2Y (ST) Y, fire class: Eca



Commercial Art.No.	94.425.1000.7
EAN	4015573459854
Order Unit	1

Certificates / Approvals



## Technical data

### General

Rated current	3 A
Rated voltage	50 V
Rated impulse voltage	0.8 kV
Pollution degree	2
Mechanical coding	yes
Lockable	self-locking (unlocking by hand)
Color of coding/ contact carrier	green
Marking of poles	1+, 2-
Color of housing inclusive strain relief	black

### Model

Nominal cross section conductor	0.5 mm <sup>2</sup>
Degree of protection (IP)	IP20
Cable type	FB-2Y(ST)Y 2x2x0,8
Cable color	green
Cable diameter max.	6.1 mm
Version of cable	female - male
Type of cord set	connecting cable
Version cable end 1	female
Version cable end 2	male

### Material

Surface finish	Gilt
----------------	------

halogen free	No
Continuous temperature of cable	70 °C
Insulation components continuous temperature	100 °C
Fire load	0.233 kWh
Fire class	Eca

**Dimensions**


Total length	1 m
--------------	-----

**Classification**

ECLASS 11	
ECLASS 8.1	27440604
ETIM 7.0	EC002587
ETIM 6.0	EC002587
ETIM 5.0	EC002587
ETIM 4.0	EC002587

**Product compliance**

ROHS conformity status	Compliant
REACH-SVHC conformity status	Compliant

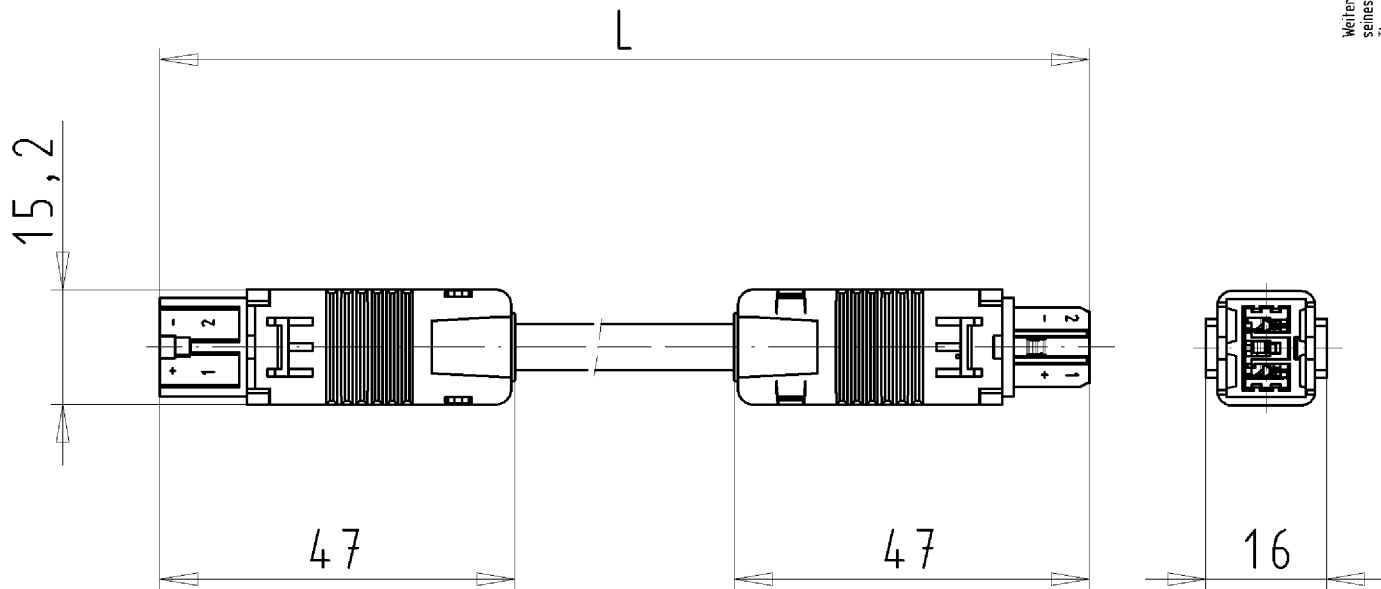

KONFEKT. LEITUNG  
 94.425.0200.7 10W  
 09.04.08 Heil D.  
 M1:1

Weitergabe sowie Vervielfältigung dieses Dokuments, Verwertung und Mitteilung seines Inhalts sind verboten, soweit nicht ausdrücklich gestattet. Die Reproduktion, Distribution und Utilization of this document as well as the communication of its contents to others without express authorization is prohibited.