


Push-in terminal block-10/1 × 2JD -
421513

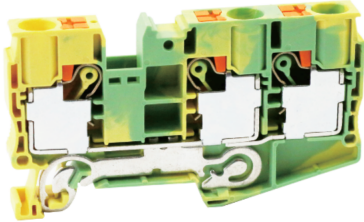

Push-in terminal block , connection method : spring connection , number of connections : 3 , crimping range : 1.5mm² -16 mm² , AWG : 16-6 , thickness:10.2mm , height:49.6mm , color : yellow-green , mounting type : TH35-7.5、 TH35-15

Product parameter

Parameter	Data
Packing unit (PCS)	22
NW per piece(g)	43.3
Layers	1
Number of connections	3
Rated cross section(mm ²)	10
Color	yellow-green
Insulation material	PA
Flame retardant grade	V0
Temperature of insulation material	-40 ~ +125
Wire feed	Above the terminal

Product certification

Parameter	Data
Certification logo	
Certification logo	
Certification logo	

Technical data

Parameter	Data
Connection Method	Spring connection
Stripping length(mm)	17
Solid conductors(mm ²)	1.5-16
Solid conductors AWG	16-6
Stranded conductors(mm ²)	1.5-10
Stranded conductors AWG	16-8
Connection in acc. with standard	IEC 60947-7-1
Operating temperature ()	-40 ~ +105
Ambient temperature (storage/transportation) ()	-25 ~ +55
Relative humidity	30% ~ 90%

Dimension

Parameter	Data
Width(mm)	89
Thickness(mm)	10.2
Height(mm)	49.6