


### Spring-cage connection terminal block- UJ5-2.5WV/2 × 2-421127

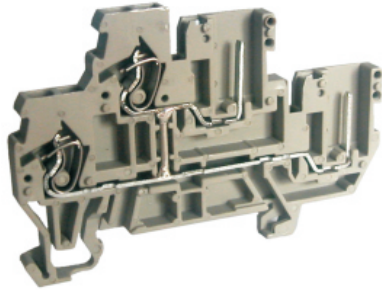

Spring-cage connection terminal block , rated voltage:500V , Max. operating current:24A, connection method:spring-cage connection, number of connection : 2 , crimping range : 0.2 mm<sup>2</sup> -4mm<sup>2</sup> , thickness:5mm , height:46.5mm , color : grey , mounting type : TH35-7.5、 TH35-15。

### Product parameter

Parameter	Data
Packing unit (PCS)	/
NW per piece(g)	/
Layers	2
Number of connections	
Rated cross section(mm <sup>2</sup> )	2.5
Color	grey
Insulation material	PA
Flame retardant grade ( UL94 )	V0
Rated voltage(V)	500
Rated current(A)	24
Temperature of insulation material	-40 ~ +125

### Product certification

Parameter	Data
Certification logo	<b>CE</b>
Certification logo	<b>RoHS</b>

### Technical data

Parameter	Data
Connection Method	Spring-cage connection
Stripping length(mm)	7
Solid conductors(mm <sup>2</sup> )	0.2-4
Stranded conductors(mm <sup>2</sup> )	0.2-2.5
Operating temperature ( )	-40 ~ +105
Ambient temperature (storage/transportation) ( )	-25 ~ +60
Relative humidity	30% ~ 90%

## Dimension

Parameter	Data
Width ( mm )	70
Thickness ( mm )	5
Height ( mm )	46.5