


REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	LJC 02/02/09'	~	LJC 02/02/09'
B	DRAWING UPDATE	JLZ 06/08/17'	~	

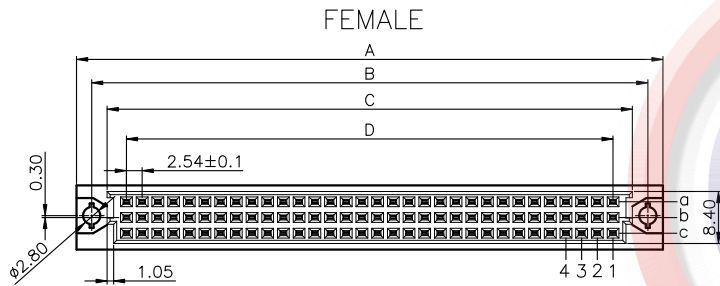

positions	A	B	C	D
96P(3*32)	94.9	90.0	85.0	78.74
48P(3*16)	54.9	50.0	44.26	38.10

NOTES:

- Specifications:
 - Contact Resistance: 20mΩ max.
 - Insulation Resistance: 1000MΩ min.
 - Current Rating: 2A.
 - Dielectric withstanding voltage: AC 1000V(r.m.s)/60s.
 - Operating Temperature: -40°C to +105°C
 - Recommend Wave Soldering Temperature: 260°C,5-10s.




2. Materials:

- Contact: Copper alloy
- Housing: PBT




3. Product Number code:

DS1120 - X X X X X X - X


- Tail Length(Dim H,For Female)
S: H=2.9mm
N/A Code: H=4.5mm
- Column with Contacts type
1: 1-3 type
2: 2-4 type
3: 1-2-3 type
- Rows with Contacts type
1: abc type(3 rows with contact)
2: ac type(2 rows with contact)
3: a type(1 rows with contact)
- Mounting type
R: right angle type
V: V/T type
- Contact plating
6: full Tin plating
0: selective gold flash
- Connector type
M: male
F: female
- No. of contacts
96 (3*32)
48 (3*16)

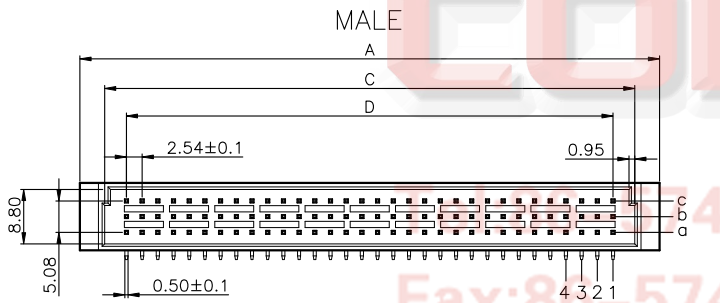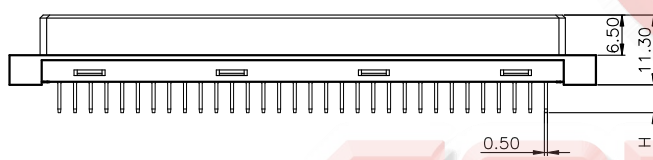

positions	A	B	C	D
96P(3*32)	93.8	88.9	85.8	78.74
48P(3*16)	53.26	48.26	44.7	38.10

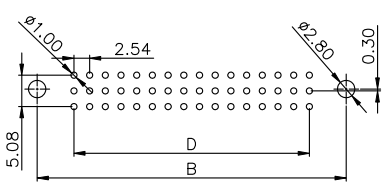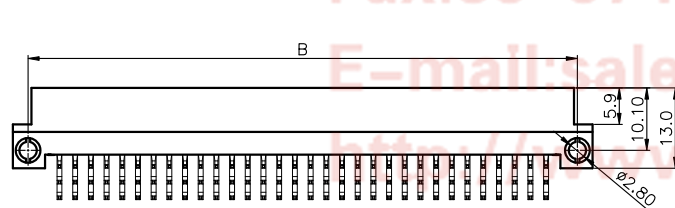

RECOMMEND PCB LAYOUT(FOR FEMALE)
TOLERANCE=±0.05mm

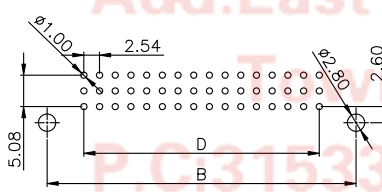

RECOMMEND PCB LAYOUT(FOR MALE)
TOLERANCE=±0.05mm

Fax:86-574-63510817

E-mail:sale@connfly.com

http://www.connfly.com

Add:East Industry Zone KuangYan


Town Cixi Ningbo China

P.C315333

GENERAL TOLERANCE	ANGLE TOLERANCE
X. ±0.60	X. ±5°
.X ±0.38	.X ±3°
.XX ±0.25	.XX ±2°

PROJECTION	TITLE
UNITS mm	DIN 41612 C & RTYPE (3ROWS)
SHEET SIZE A4	SERIES DS1120 SERIES

DRAWING TYPE	CUSTOMER
SCALE 1:1	SHEET 1 OF 2
DRAWING NO. C-DS1120-XXXXXXX-B	

 **晨翔电子有限公司**
CONNFLY CONNFLY ELECTRONIC CO., LTD

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	LJC 02/02/09'	~	LJC 02/02/09'
B	DRAWING UPDATE	JLZ 06/08/17'	~	

Reference to female R/A type				
Pitch	Position	Row with contacts	column with contacts	Contact Arrange
2.54	96 (3*32)	abc	1-2-3	
		abc	1-3	
		abc	2-4	
		ac	1-2-3	
		ac	1-3	
		ac	2-4	
		a	1-2-3	
		a	1-3	
a	2-4			

Reference to female R/A type				
Pitch	Position	Row with contacts	column with contacts	Contact Arrange
2.54	48 (3*16)	abc	1-2-3	
		abc	1-3	
		abc	2-4	
		ac	1-2-3	
		ac	1-3	
		ac	2-4	
		a	1-2-3	
		a	1-3	
a	2-4			

GENERAL TOLERANCE		ANGLE TOLERANCE	
X.	±0.60	X.	±5°
.X	±0.38	.X	±3°
.XX	±0.25	.XX	±2°

PROJECTION	TITLE
	DIN 41612 C & RTYPE (3ROWS)
UNITS	mm
SHEET SIZE	A4
SERIES	DS1120 SERIES

DRAWING TYPE	CUSTOMER	
SCALE	1:1	SHEET 2 OF 2
DRAWING NO.	C-DS1120-XXXXXXX-B	

晨翔电子有限公司
CONNFLY CONNFLY ELECTRONIC CO., LTD

Tel: 86-574-63508787
 Fax: 86-574-63510817
 E-mail: sales@connfly.com
 http://www.connfly.com
 Add: East Industry Zone KuangYan
 Town Ningbo City
 P.C: 315333