
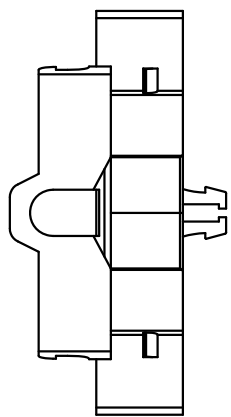
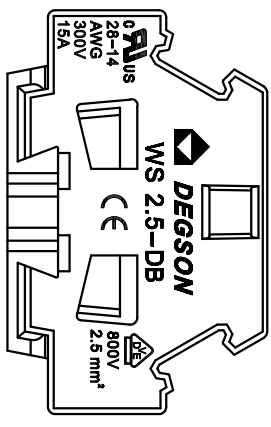

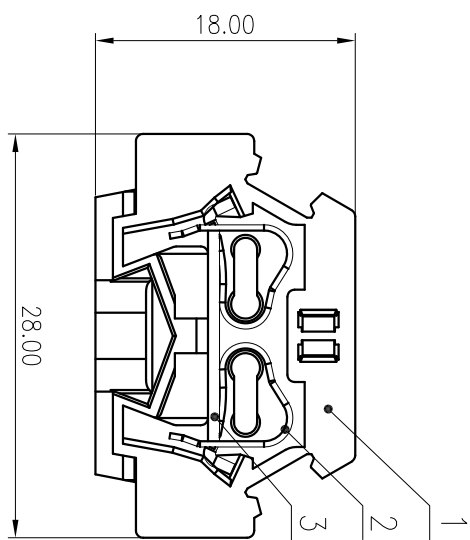
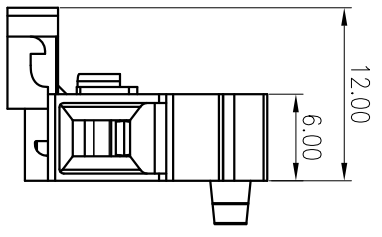


公差/General tolerances(mm)		0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	0.1/1.0
~	~	3	6	10	18	30	50	80	120	180	250	315	400	500	±Z
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50		

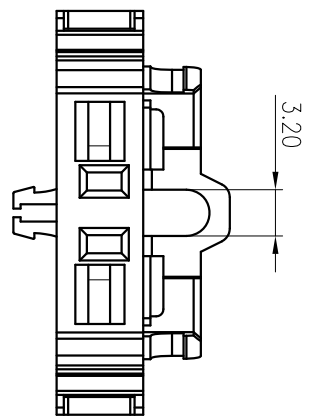

ITEM	NAME OF PART	MATERIAL	NOTES
3	Current carrier	Copper	Sn plated
2	Shrapnel	Stainless steel	
1	Housing	PA66	UL94V-0

REV	EGN	DESCRIPTION	DWFT	DATE

MATERIAL:	/	SURFACE:	/
MAT NO.:	/	宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD	
STATUS:	/	NAME: WS2.5-DB-01P-1Y-00A(H)	
APPD:	Li GL 2020.04.04	DRAWING NO.: WS2.5-DB-C01	
CHKD:	Mao J 2020.04.04	REV: TO	
DWFT:	Yangys 2019.10.11	SCALE: 2:1 SHEET 1/1	
TYPE: CUSTOMER DRAWING			

UL 标准/UL Standard:	B	C	D
额定电压/电流/Rated Voltage(V)/Current(A)	300/15	300/15	300/10
EC 标准/IEC Standard:			
过压类别/Overvoltage Category/污染等级/Pollution Degree	III/3	/	/
额定电压/电流/Rated Voltage(V)/Current(A)	800/24	/	/
额定脉冲电压(KV)/Rate Impulse Voltage(KV)	8.0	/	/
致径范围(硬导线/软导线)/Wire Range(rigid and flexible)(mm²/AWG)	0.2~2.5/28~14		
间距/Pitch(mm)	6.0		
剥线长度/Stripping length(mm)	8-9		
使用温度范围/Operating temperature(°C)	-40~+105		
符合RoHS环保要求/Conform to RoHS	Yes		
标准颜色编号/Standard color number:	/		
PANTONE / RAL	/		