


Dept	Qty
DC	1
ED	1
IE	1
ISO	1
PD	1
R&D	1
SD	1
QA	1
QC	1
QE	1

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	LL 09/11/06'		LJC 09/11/06'
B	Arrangement drawing	JLZ 12/23/15'	HZW 12/23/15'	LJC 12/23/15'
C	DRAWING UPDATE	JLZ 08/27/18'		

The information provided herein is from CONNELY Electronic Co., Ltd. and is confidential. Any disclosure to a party other than the recipient is prohibited. The intellectual properties and its rights contained herein, including but not limited to, trademarks, patents, copyrights, trade secrets, and technical know-how, are owned exclusively by CONNELY or its affiliates. Unauthorized use or reproduction of any information contained herein, in any form or by any means, without the prior written permission of CONNELY is strictly prohibited. CONNELY may enforce its intellectual property rights at its own discretion, failures or delays to exercise such rights does not constitute a waiver of such rights.

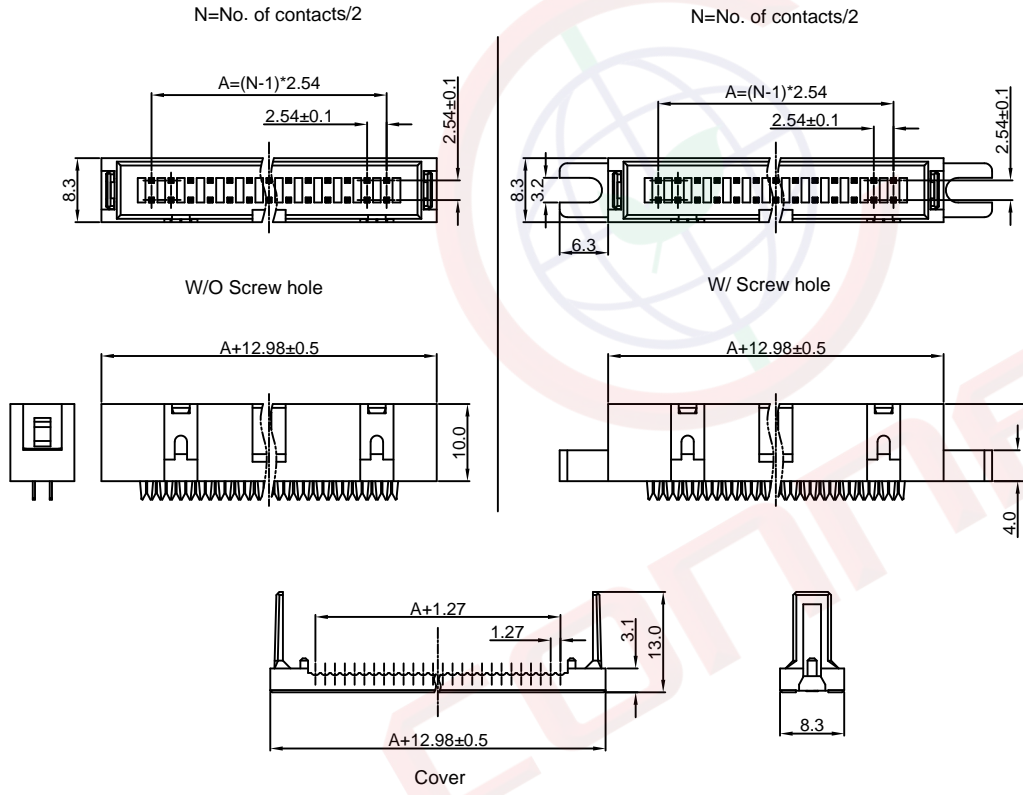

**NOTES:**

- Material
  - Insulator: Thermoplastic (UL 94V-0).
  - Contact: Copper alloy.
- Specification
  - Temperature range: -40°C ~ +105°C.
  - Contact resistance: 20mΩ max.
  - Insulation resistance: 1000MΩ min.
  - Dielectric withstanding voltage: AC 500V per minute.
- Product number code:
 

DS1015 - X X X X X

  - Housing color: A: Gray, B: Black
  - Contact plating: 2: Gold flash + Nickel
  - Strain relief: N: W/O
  - Screw hole: M: W/ Screw hole, N: W/O Screw hole
  - No. of contacts: 10 14 16 20 24 26, 30 34 40 50 60 64



(Series Image-Reference Only)

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	IDC BOX HEADER MATES
X.	±0.60	X.	±5°	UNITS	mm	WITH PITCH 1.27mm FLAT CABLE	
.X	±0.38	.X	±3°	SHEET SIZE	A4	SERIES	DS1015 SERIES
.XX	±0.25	.XX	±2°	<b>晨翔电子有限公司</b> <b>CONNFLY CONNELY ELECTRONIC CO. LTD</b>			
DRAWING TYPE		CUSTOMER					
SCALE		1:1					
DRAWING NO.		C-DS1015-XXXXX-C					