


Spring-cage connection terminal block-
UJ5-2.5WV/3-3JD-421142

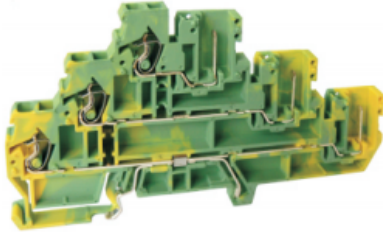

Terminal block, connection methods:spring-cage connection, number of connection:3, crimping range:0.2mm² -4mm² , AWG : 24-12 , Thickness :5mm , Height:59mm , color:yellow green, mounting rail: TH35-7.5、 TH35-15.

Product parameter

Parameter	Data
Packing unit(pcs)	50
NW per piece(g)	21.7
Layers	3
Number of connections	3
Rated cross section(mm ²)	2.5
Color	Yellow green
Insulation material	PA
Flame retardant grade	V0
Rated voltage(V)	/
Rated current(A)	/
Temperature of insulation material	-40 ~ +125
Wire feed	Above the terminal

Product certification

Parameter	Data
Certification logo	CE
Certification logo	RoHS

Technical data

Parameter	Data
Connection Method	Spring-cage connection
Stripping length(mm)	7
Solid conductors(mm ²)	0.2-4
Solid conductors AWG	24-12
Stranded conductors(mm ²)	0.2-2.5
Stranded conductors AWG	24-12
Operating temperature ()	-40 ~ +105
Ambient temperature (storage/transportation) ()	-25 ~ +55
Relative humidity	30% ~ 90%
Connection in acc. with standard	IEC 60947-7-2

Dimension

Parameter	Data
Width(mm)	106.5
Thickness(mm)	5
Height(mm)	59