


Spring-cage connection terminal block-
UJ5-2.5WV/3 × 3JD-421143



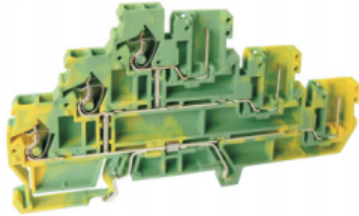

Terminal block , connection methods : spring-
cage connection , number of
connection : 3 , crimping range : 0.2mm² -4m
m² , AWG : 24-12 , thickness:5mm , Height:5
9mm , color : yellow green , mounting
rail : TH35-7.5、 TH35-15.

Product parameter

Parameter	Data
Packing unit(pcs)	50
NW per piece(g)	18.3
Layers	3
Number of connections	3
Rated cross section(mm ²)	2.5
Color	Yellow green
Insulation material	PA
Flame retardant grade	V0
Rated voltage(V)	/
Rated current(A)	/
Temperature of insulation material	-40 ~ +125
Wire feed	Above the terminal

Product certification

Parameter	Data
Certification logo	
Certification logo	

Technical data

Parameter	Data
-----------	------

Parameter	Data
Connection Method	Spring-cage connection
Stripping length(mm)	7
Solid conductors(mm ²)	0.2-4
Solid conductors AWG	24-12
Stranded conductors(mm ²)	0.2-2.5
Stranded conductors AWG	24-12
Operating temperature ()	-40 ~ +105
Ambient temperature (storage/transportation) ()	-25 ~ +55
Relative humidity	30% ~ 90%
Connection in acc. with standard	IEC 60947-7-2

Dimension

Parameter	Data
Width(mm)	106.5
Thickness(mm)	5
Height(mm)	59